20-3-H 2-jaw universal puller with hydraulic spindle, spread 0 mm to 250 mm, reach 210 mm



DESCRIPTION

The 2-jaw universal pullers with sliding, always parallel jaws from series 20 are used for pulling bearings, gears, and discs in all common sizes for crafts, workshop, and industry. This allows for the removal of any component that sits on a shaft and is freely accessible from the outside. The puller all-rounders ensure a non-destructive disassembly for both external extraction and internal pulling. Depending on the application, there are different variants of the 2-jaw universal puller. Series 20 also impresses with its modular system, which offers a variety of optional combinations. This includes, for example, different types of jaws, extensions, interchangeable pressure pieces, hydraulic extensions, and much more.

APPLICATION AREA

To detach bearings, gears, and discs in all common sizes for crafts, workshops, and industry.

BENEFIT

- The screw connection allows for easy loosening and particularly tight fastening of the jaws with an allen key
- Application also for eccentric components through freely movable jaws gliding on the crossbar
- Variable adjustment for any span between 0 mm – 250 mm as well as reach depth between 210 mm –
- - Variable adaptation to any span width between xx - xxx mm as well as clamping depth xx - xxx mm
- Nothing
- Anti-slip safety (spindle neck) at the spindle head for safe working with a wrench
- Spindle run-out to protect the thread

OPERATION

- Position the puller jaws on the part to be removed from the outside
- Slide the jaws under the component
- Use a wrench to secure the jaws
- Manually pull the spindle to lock it in place
- Activate the lever arm on the hydraulic pump until the part is released

APPLICATION IMAGE




MASTER DATA

GTIN [GTIN]	4021176786839
Country of origin	DE
Material	Tool steel
Series	20-H
Gross weight [kg]	7,53 kg
Package contents	1 piece
Packaging Act	PAPPE PAP 21
Worldwide sales capability	Yes (REACH, RoHS, POP, PROP65, TSCA)


SPARE PARTS

- 20-3H-T_Crossbar
- 3-Standard-jaws
- 8-HP-626_Hydraulic spindle with hand lever operation
- 8-HP-EP
- 800_short hydraulic spindle
- 800-150_Extension


2-jaw universal puller with hydraulic spindle, spread 0 mm to 250 mm, reach 210 mm

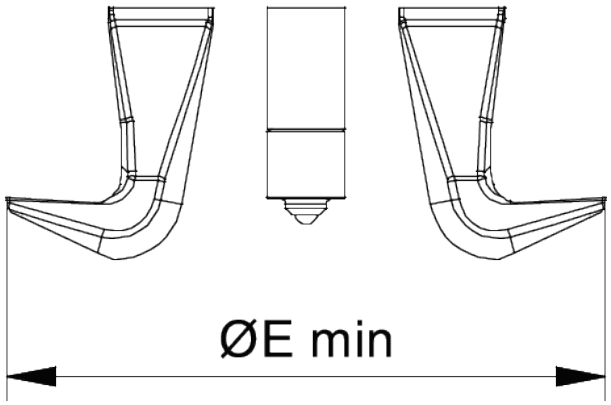


Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

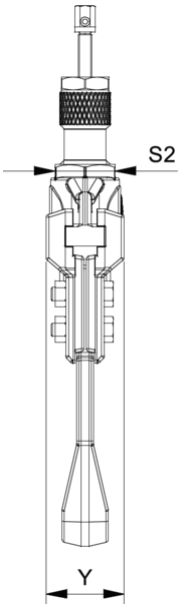

Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

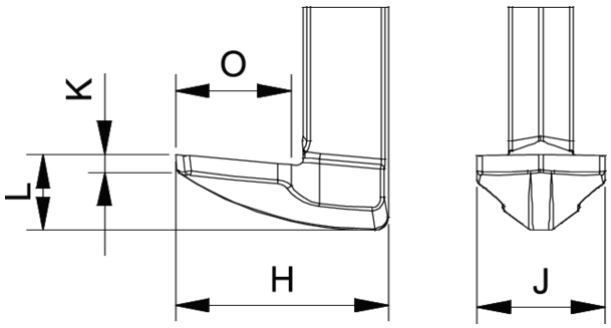


Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

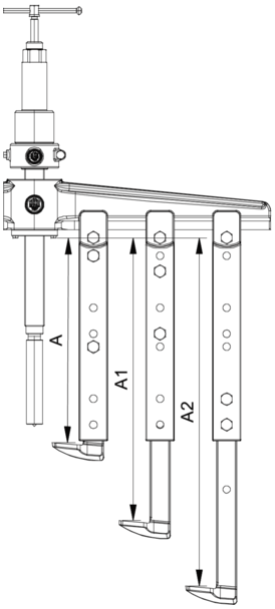


Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t

Fmax	Max. tensile force [kN]	120 kN

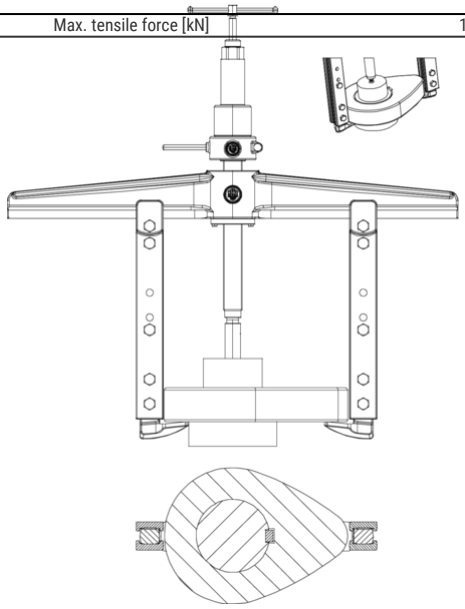

Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

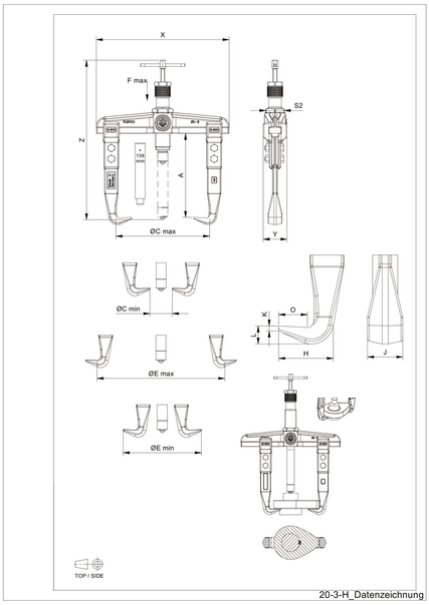

Abbreviation	Attribut	Wert
A	Clamping depth of external puller [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN