
DIN 6799

Lock washers

For shafts

Spring steel | bright | Cr(VI)-free



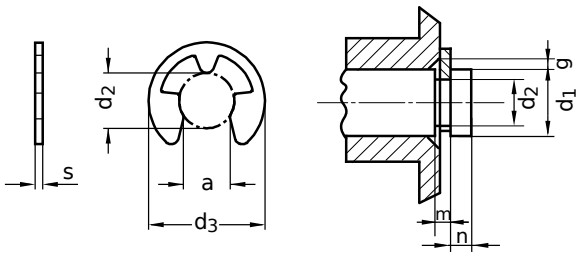

Diameter	a			d_1		d_2	
(d)	nominal size	min.	max.	min.	max.	min.	max.
1.5	1.28	1.24	1.32	2.0	2.5	1.44	1.5
1.9	1.61	1.57	1.65	2.5	3.0	1.84	1.9
1.2	1.01	0.97	1.05	1.4	2.0	1.14	1.2
2.3	1.94	1.90	1.98	3.0	4.0	2.24	2.3
3.2	2.70	2.66	2.74	4.0	5.0	3.12	3.2
4	3.34	3.29	3.39	5.0	7.0	3.92	4.0
5	4.11	4.06	4.16	6.0	8.0	4.92	5.0
6	5.26	5.21	5.31	7.0	9.0	5.92	6.0
7	5.84	5.79	5.89	8.0	11.0	6.91	7.0
8	6.52	6.46	6.58	9.0	12.0	7.91	8.0
9	7.63	7.57	7.69	10.0	14.0	8.91	9.0
10	8.32	8.26	8.38	11.0	15.0	9.91	10.0
12	10.45	10.38	10.52	13.0	18.0	11.89	12.0
15	12.61	12.54	12.68	16.0	24.0	14.89	15.0
19	15.92	15.85	15.99	20.0	31.0	18.87	19.0

Diameter	d_3	g	m		n	s		
(d)	max.	nominal size	nominal size	max.	min.	nominal size	min.	max.
1.5	4.25	0.6	0.44	0.48	0.8	0.40	0.38	0.42
1.9	4.80	0.7	0.54	0.59	1.0	0.50	0.48	0.52
1.2	3.25	0.4	0.34	0.38	0.6	0.30	0.28	0.32
2.3	6.30	0.9	0.64	0.69	1.0	0.60	0.58	0.62
3.2	7.30	0.9	0.64	0.69	1.0	0.60	0.58	0.62
4	9.30	1	0.74	0.79	1.2	0.70	0.68	0.72
5	11.30	1	0.74	0.79	1.2	0.70	0.68	0.72
6	12.30	1.1	0.74	0.79	1.2	0.70	0.68	0.72
7	14.30	1.3	0.94	0.99	1.5	0.90	0.88	0.92
8	16.30	1.5	1.05	1.13	1.8	1.00	0.97	1.03
9	18.80	1.61	1.15	1.23	2.0	1.10	1.07	1.13
10	20.40	1.8	1.25	1.33	2.0	1.20	1.17	1.23

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 6799

Lock washers

For shafts

Spring steel | bright | Cr(VI)-free

Diameter	d_3	g	m		n	s		
(d)	max.	nominal size	nominal size	max.	min.	nominal size	min.	max.
12	23.40	1.9	1.35	1.43	2.5	1.30	1.27	1.33
15	29.40	2.2	1.55	1.63	3.0	1.50	1.47	1.53
19	37.60	2.5	1.80	1.88	3.5	1.75	1.72	1.78

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.