**E 5454**


# EJOT® Delta PT screws

**Countersunk head | Torx plus / Autosert drive**



Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

Note: Further information and CAD files can be obtained directly from EJOT:
http://www.ejot.com/industry

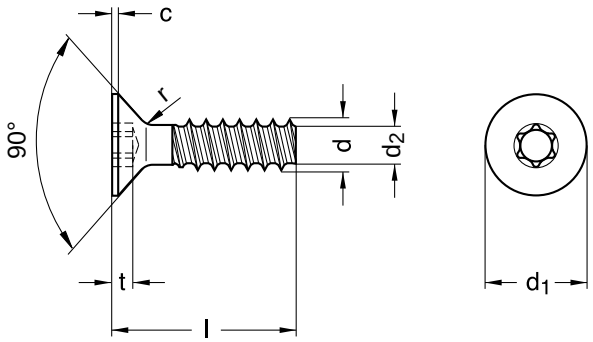


| Diameter (d) | Tool size | c max. | $d_1$ max. | $d_2$ nominal size | r nominal size | Pitch (P) | t max. | t min. |
|---|---|---|---|---|---|---|---|---|
| M2.2 | T6 | 0.35 | 4.4 | 1.51 | 0.8 | 0.85 | 0.65 | 0.50 |
| M2.5 | T8 | 0.55 | 5.0 | 1.72 | 1 | 0.95 | 0.90 | 0.70 |
| 2.5 | | | | 1.72 | | | | |
| 3 | T10 | 0.55 | 6.0 | 2.09 | 1.2 | 1.12 | 1.00 | 0.75 |
| M3.5 | T15 | 0.65 | 7.0 | 2.45 | 1.4 | 1.29 | 1.30 | 0.95 |
| 4 | T20 | 0.70 | 8.0 | 2.81 | 1.6 | 1.46 | 1.45 | 1.10 |
| 4 | | | | 2.81 | | | | |
| 5 | T25 | 0.75 | 10.0 | 3.53 | 2 | 1.80 | 1.65 | 1.25 |
| 6 | T30 | 0.85 | 12.0 | 4.26 | 2.4 | 2.14 | 2.00 | 1.50 |

| Length (l) | | |
|---|---|---|
| nominal size | min. | max. |
| 6 | 5.62 | 6.38 |
| 7 | 6.55 | 7.45 |
| 8 | 7.55 | 8.45 |
| 9 | 8.55 | 9.45 |
| 10 | 9.55 | 10.45 |
| 12 | 11.45 | 12.55 |

| Length (l) | | |
|---|---|---|
| nominal size | min. | max. |
| 14 | 13.45 | 14.55 |
| 16 | 15.45 | 16.55 |
| 20 | 19.35 | 20.65 |

All technical data refer to the measure mm


All technical data without obligation. Subject to technical changes and errors.

**E 5454**

# EJOT® Delta PT screws

**Countersunk head | Torx plus / Autosert drive**

Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

| Diameter | Length (l) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| (d) | 6 | 7 | 8 | 9 | 10 | 12 | 14 | 16 | 20 |
| M2.2 | ● | | ● | | | | | | |
| 2.5 | | ● | ● | | ● | ● | | | |
| 3 | ● | | ● | ● | ● | ● | | ● | |
| M3.5 | | | | | ● | | | ● | ● |
| 4 | | | | | | ● | ● | ● | |
| 5 | | | | | | | | | ● |
| 6 | | | | | | | | | ● |

All technical data refer to the measure mm



All technical data without obligation. Subject to technical changes and errors.