E 5451


EJOT® Delta PT screws

Pan head with pressed-on washer | Torx Plus / Autosert drive

Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

Note: Further information and CAD files can be obtained directly from EJOT:
http://www.ejot.com/industry



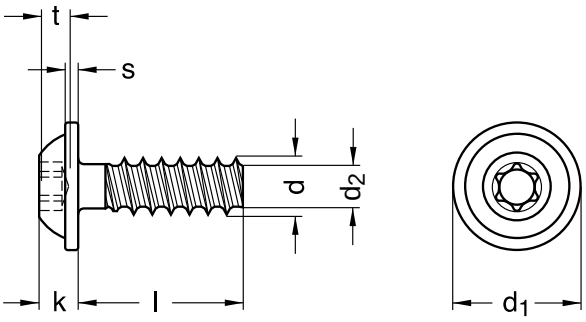

Diameter (d)	Tool size	d_1 max.	d_2 nominal size	k nominal size	s nominal size	Pitch (P)	t max.	t min.
2	T6	4.5	1.36	1.6	0.6	0.78	0.85	0.65
M2.2	T6	5.0	1.51	1.6	0.6	0.85	0.85	0.65
M2.5	T8	5.5	1.72	1.9	0.7	0.95	1.00	0.80
3	T10	6.5	2.09	2.3	0.8	1.12	1.30	1.00
M3.5	T15	7.5	2.45	2.7	0.9	1.29	1.50	1.10
4	T20	9.0	2.81	3.1	1.0	1.46	1.80	1.40
M4.5	T20	10.0	3.17	3.2	1.1	1.63	1.80	1.40
5	T25	11.0	3.53	3.5	1.2	1.80	1.90	1.50
6	T30	13.5	4.26	4.2	1.4	2.14	2.40	1.90

Length (l)		
nominal size	min.	max.
5	4.62	5.38
6	5.62	6.38
7	6.55	7.45
8	7.55	8.45
9	8.55	9.45
10	9.55	10.45
11	10.45	11.55
12	11.45	12.55

Length (l)		
nominal size	min.	max.
14	13.45	14.55
16	15.45	16.55
18	17.45	18.55
20	19.35	20.65
22	21.35	22.65
25	24.35	25.65
30	29.35	30.65

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

E 5451

EJOT® Delta PT screws

Pan head with pressed-on washer | Torx Plus / Autosert drive

Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

Diameter	Length (l)													
(d)	5	6	7	8	9	10	11	12	14	16	18	20	22	25	30
2	●	●													
M2.2	●	●		●		●									
M2.5	●	●	●	●		●	●	●					●		
3		●		●		●		●	●	●	●	●		●	●
M3.5				●		●		●		●		●		●	●
4				●		●		●	●	●	●	●		●	
M4.5					●										
5								●	●	●	●	●		●	●
6									●	●	●	●		●	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.