
Self-locking nuts

With metric fine thread of stainless steel

Steel 5 | zinc-plated | Cr(VI)-free | Metric standard thread

Note: Nut material: steel SS400, zinc-plated | Material insert: stainless steel



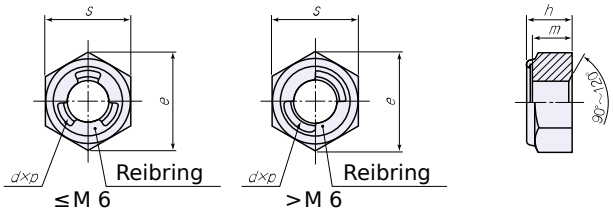

Diameter (d)	e nominal size	h nominal size	h min.	h max.	m nominal size	s nominal size	s min.	s max.	Pitch (P)	Retaining ring
M4	8.1	3.8	3.5	4.1	3.0	7	6.80	7	0.70	triple, 60° each
M5	9.2	4.6	4.3	4.9	3.9	8	7.80	8	0.80	triple, 60° each
M6	11.5	5.1	4.8	5.4	4.2	10	9.80	10	1.00	triple, 60° each
M8	15.0	7.3	6.9	7.7	6.1	13	12.75	13	1.25	double, 90° each
M10	19.6	8.3	7.9	8.7	7.1	17	16.75	17	1.50	double, 90° each
M12	21.9	10.5	10.1	10.9	9.0	19	18.65	19	1.75	double, 90° each
M14	25.4	12.5	12.0	13.0	11.0	22	21.65	22	2.00	double, 90° each
M16	27.7	14.5	14.0	15.0	13.0	24	23.65	24	2.00	double, 90° each
M20	34.6	17.5	17.0	18.0	15.4	30	29.65	30	2.50	double, 90° each
M24	41.6	21.5	20.9	22.1	18.8	36	35.60	36	3.00	double, 90° each
M30	53.1	27.0	26.2	27.8	24.0	46	45.60	46	3.50	double, 90° each

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.