DIN 933 similar to ISO 4017

Hexagon head bolts


Hexagon head | external hex | fully threaded



Stainless steel A2 | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22 | screws can be paired with a 6h tolerance-compliant female thread

There is a separation into product classes A and B, with the data sheet showing the largest range of values. For more information, see the technical details of the selected article.

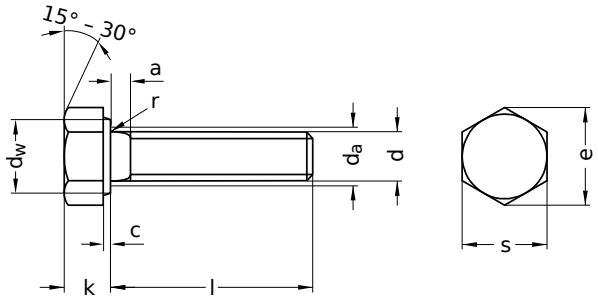

Diameter	Tool	a	c		d_a	d_w	e	k			r	s		Pitch
(d)	size	max.	min.	max.	max.	min.	min.	nominal size	min.	max.	min.	max.	min.	(P)
M2	SW 4	1.20	0.10	0.25	2.6	3.2	4.32	1.4	1.28	1.52	0.10	4.0	3.82	0.40
M3	SW 5,5	1.50	0.15	0.40	3.6	4.6	6.04	2.0	1.88	2.12	0.10	5.5	5.32	0.50
M4	SW 7	2.10	0.15	0.40	4.7	5.7	7.50	2.8	2.60	3.00	0.20	7.0	6.64	0.70
M5	SW 8	2.40	0.15	0.50	5.7	6.7	8.63	3.5	3.35	6.35	0.20	8.0	7.64	0.80
M6	SW 10	3.00	0.15	0.50	6.8	8.7	10.89	4.0	3.76	4.24	0.25	10.0	9.64	1.00
M8	SW 13	3.75	0.15	0.60	9.2	11.4	14.20	5.3	5.06	5.54	0.40	13.0	12.57	1.25
M10	SW 17	4.50	0.15	0.60	11.2	15.4	18.72	6.4	6.11	6.69	0.40	17.0	16.57	1.50
M12	SW 19	5.25	0.15	0.60	13.7	17.2	20.88	7.5	7.21	7.79	0.60	19.0	18.48	1.75
M14	SW 22	6.00	0.15	0.60	15.7	20.1	23.91	8.8	8.51	9.09	0.60	22.0	21.16	2.00
M16	SW 24	6.00	0.20	0.80	17.7	22.0	26.17	10.0	9.71	10.29	0.60	24.0	23.16	2.00
M18	SW 27	7.50	0.20	0.80	20.2	24.8	29.56	11.5	11.15	11.85	0.60	27.0	26.15	2.50
M20	SW 30	7.50	0.20	0.80	22.4	27.7	32.95	12.5	12.15	12.85	0.80	30.0	29.16	2.50
M22	SW 32	7.50	0.20	0.80	24.4	29.5	35.03	14.0	13.65	14.35	0.80	32.0	31.00	2.50
M24	SW 36	9.00	0.20	0.80	26.4	33.2	39.55	15.0	14.65	15.35	0.80	36.0	35.00	3.00
M27	SW 41	9.00	0.20	0.80	30.4	38.0	45.20	17.0	16.65	17.35	1.00	41.0	40.00	3.00
M30	SW 46	10.50	0.20	0.80	33.4	42.7	50.85	18.7	18.28	19.12	1.00	46.0	45.00	3.50
M33	SW 50	10.50	0.20	0.80	36.4	46.5	55.37	21.0	20.68	21.42	1.00	50.0	49.00	3.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 933 similar to ISO 4017

Hexagon head bolts

Hexagon head | external hex | fully threaded

Stainless steel A2 | Cr(VI)-free | Metric thread

Length (l)		
nominal size	min.	max.
6	5.76	6.24
8	7.71	8.29
10	9.71	10.29
12	11.65	12.35
14	13.65	14.35
16	15.65	16.35
18	17.65	18.35
20	19.58	20.42
22	20.95	23.05
25	23.95	26.05
30	28.95	31.05
35	33.75	36.25

Length (l)		
nominal size	min.	max.
40	38.75	41.25
45	43.75	46.25
50	48.75	51.25
55	53.50	56.50
60	58.50	61.50
65	63.50	66.50
70	68.50	71.50
75	73.50	76.50
80	78.50	81.50
85	83.25	86.75
90	88.25	91.75
100	98.25	101.75

Length (l)		
nominal size	min.	max.
110	108.25	111.75
120	118.25	121.75
130	128.00	132.00
140	138.00	142.00
150	148.00	152.00
160	158.00	162.00
180	178.00	182.00

Diameter	Length (l)																												
(d)	6	8	10	12	14	16	18	20	22	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100	110	120	130	140	150	160	180
M2			●																												
M3	●	●	●	●		●		●		●																					
M4	●	●	●	●	●	●		●		●	●	●	●	●	●	●	●														
M5	●	●	●	●	●	●	●	●		●	●	●	●	●	●		●		●												
M6		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		●		●	●					
M8			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●					
M10			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●		
M12						●		●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●		
M14								●		●	●	●	●	●	●	●	●	●	●	●	●		●						●		
M16								●		●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●			
M18															●		●	●	●	●	●		●	●							
M20												●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●		●
M22																			●	●	●		●	●							
M24														●	●		●	●	●	●	●		●	●	●	●				●	
M27																		●					●								
M30																			●					●							
M33																					●										

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.