
DIN 910

Locking screws

Hexagon head with flange

Steel | bright | Cr(VI)-free | Cylindrical metric fine thread



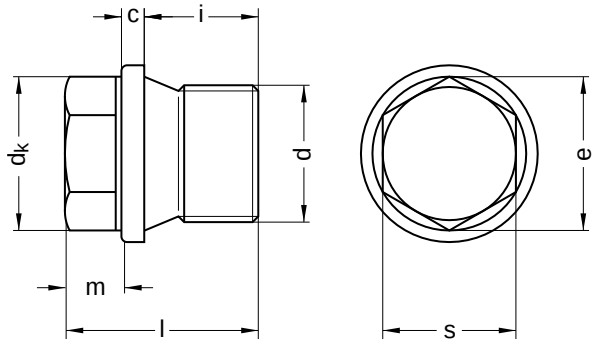

Diameter (d)	Tool size	c nominal size	c max.	d_k nominal size	i	m nominal size	e min.	s nominal size	Pitch (P)
M10 x 1	SW 10	3	3.5	14	8	6	10.89	10	1.0
M12 x 1.5	SW 13	3	3.5	17	12	6	14.20	13	1.5
M14 x 1.5	SW 13	3	3.5	19	12	6	14.20	13	1.5
M16 x 1.5	SW 17	3	3.5	21	12	6	17.59	16	1.5
M18 x 1.5	SW 17	4	4.5	23	12	8	17.59	16	1.5
M20 x 1.5	SW 19	4	4.5	25	14	8	19.85	18	1.5
M22 x 1.5	SW 19	4	4.5	27	14	8	19.85	18	1.5
M24 x 1.5	SW 22	4	4.5	29	14	9	22.78	21	1.5
M26 x 1.5	SW 24	4	4.5	31	16	10	26.17	24	1.5
M30 x 1.5	SW 24	4	4.5	36	16	10	26.17	24	1.5
M38 x 1.5	SW 27	5	5.5	44	16	11	29.56	27	1.5
M42 x 1.5	SW 30	5	5.5	49	16	12	32.95	30	1.5
M48 x 2	SW 30	5	5.5	55	16	12	32.95	30	2.0

Length (l) nominal size
17
21
24
26
27
30

Length (l) nominal size
32
33

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 910

Locking screws

Hexagon head with flange

Steel | bright | Cr(VI)-free | Cylindrical metric fine thread

Diameter (d)	Length (l)							
	17	21	24	26	27	30	32	33
M10 x 1	●							
M12 x 1.5		●						
M14 x 1.5		●						
M16 x 1.5		●						
M18 x 1.5			●					
M20 x 1.5				●				
M22 x 1.5				●				
M24 x 1.5					●			
M26 x 1.5						●		
M30 x 1.5						●		
M38 x 1.5							●	
M42 x 1.5								●
M48 x 2								●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.