
ISO 8748

Spiral spring pins

Heavy duty

Spring steel | bright | Cr(VI)-free



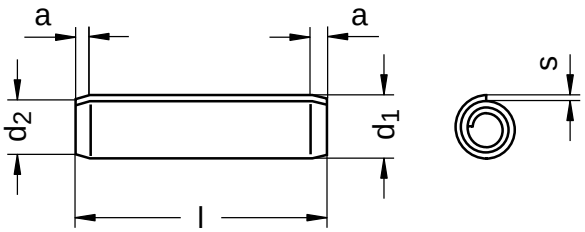

Diameter (d)	a	d_1 min.	d_1 max.	d_2 max.	s nominal size
2	0.7	2.11	2.21	1.90	0.22
3	0.9	3.12	3.25	2.90	0.33
4	1.1	4.15	4.30	3.90	0.45
5	1.3	5.15	5.35	4.85	0.56
6	1.5	6.18	6.40	5.85	0.67
8	2.0	8.25	8.55	7.80	0.90

Length (l)		
nominal size	min.	max.
8	7.75	8.25
10	9.75	10.25
12	11.50	12.50
14	13.50	14.50
16	15.50	16.50
18	17.50	18.50
20	19.50	20.50
22	21.50	22.50
24	23.50	24.50
26	25.50	26.50

Length (l)		
nominal size	min.	max.
28	27.50	28.50
30	29.50	30.50
32	31.50	32.50
36	35.50	36.50
40	39.50	40.50
45	44.50	45.50
50	49.50	50.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

ISO 8748

Spiral spring pins

Heavy duty

Spring steel | bright | Cr(VI)-free

Diameter (d)	Length (l)															
	8	10	12	14	16	18	20	22	24	26	28	30	32	36	40	45	50
2				●			●										
3	●	●	●	●	●	●	●	●		●							
4		●	●	●	●	●	●	●	●	●	●	●					
5			●	●	●	●	●	●	●	●	●	●			●		●
6					●	●	●	●	●	●	●	●		●		●	●
8												●	●		●	●	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.