
DIN 603

Mushroom head bolts

With square neck | without nut

Steel 8.8 | zinc-plated, thick-film passivated (VZD) | Cr(VI)-free | Metric thread



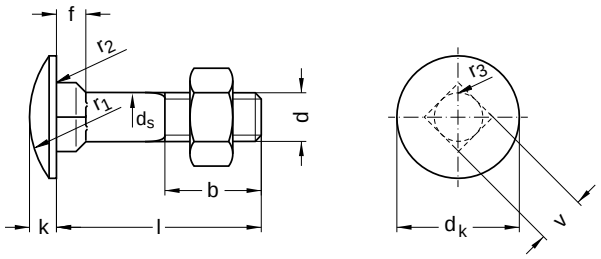

Diameter (d)	b			d_k		d_s		f	
	l up to 125	l up to 200	l longer than 200	min.	max.	min.	max.	min.	max.
M6	18	24	–	15.45	16.55	5.52	6	3.40	4.60
M8	22	28	41	19.35	20.65	7.42	8	4.40	5.60
M10	26	32	45	23.35	24.65	9.42	10	5.40	6.60
M12	30	36	49	29.35	30.65	11.30	12	7.25	8.75
M16	38	44	57	37.20	38.80	15.30	16	11.10	12.90

Diameter (d)	k		r_1	r_2	r_3	Pitch	v	
	min.	max.	nominal size	nominal size		(P)	max.	min.
M6	3.12	3.88	12.6	0.5	0.9	1.00	6.48	5.52
M8	4.12	4.88	16.0	0.5	1.2	1.25	8.58	7.42
M10	4.62	5.38	19.2	0.5	1.5	1.50	10.58	9.42
M12	6.05	6.95	24.1	1.0	1.8	1.75	12.70	11.30
M16	8.05	8.95	29.3	1.0	2.4	2.00	16.70	15.30

Length (l)		
nominal size	min.	max.
16	15.10	16.90
20	18.95	21.05
25	23.95	26.05
30	28.95	31.05
35	33.75	36.25
40	38.75	41.25

Length (l)		
nominal size	min.	max.
45	43.75	46.25
50	48.75	51.25
55	53.50	56.50
60	58.50	61.50
65	63.50	66.50
70	68.50	71.50

Length (l)		
nominal size	min.	max.
80	78.50	81.50
90	88.25	91.75
100	98.25	101.75

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 603

Mushroom head bolts

With square neck | without nut

Steel 8.8 | zinc-plated, thick-film passivated (VZD) | Cr(VI)-free | Metric thread

Diameter	Length (l)													
(d)	16	20	25	30	35	40	45	50	55	60	65	70	80	90	100
M6	●	●	●	●	●	●		●							
M8	●	●	●	●	●	●	●	●	●	●		●	●		
M10		●	●	●	●	●	●	●	●	●	●	●	●	●	●
M12			●	●	●	●	●	●	●		●	●	●	●	●
M16							●		●						●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.