DIN 439 similar to ISO 4035


Hexagon nuts

Low version | Form B: with chamfer



Steel 04 | bright | Cr(VI)-free | Metric fine thread

Further information: DIN-standard has been withdrawn | different spanner widths for M10, M12, M14 and M22 | only the regular thread is included in ISO 4035 | the fine thread was transferred to ISO 8675

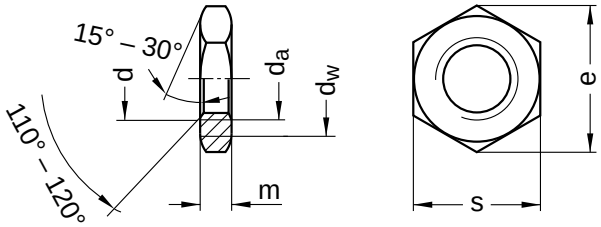

Diameter	Tool	d_a		d_w	e	m		s		Pitch
(d)	size	min.	max.	min.	min.	min.	max.	min.	max.	(P)
M8 x 1	SW 13	8	8.75	11.6	14.38	3.70	4.0	12.73	13	1.00
M10 x 1	SW 17	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.00
M10 x 1.25	SW 17	10	10.80	15.6	18.90	4.70	5.0	16.73	17	1.25
M12 x 1.25	SW 19	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.25
M12 x 1.5	SW 19	12	13.00	17.4	21.10	5.70	6.0	18.67	19	1.50
M14 x 1.5	SW 21	14	15.10	20.5	24.49	6.42	7.0	21.67	22	1.50
M16 x 1.5	SW 24	16	17.30	22.5	26.75	7.42	8.0	23.67	24	1.50
M18 x 1.5	SW 27	18	19.50	24.9	29.56	8.42	9.0	26.16	27	1.50
M20 x 1.5	SW 30	20	21.60	27.7	32.95	9.10	10.0	29.16	30	1.50
M20 x 2	SW 30	20	21.60	27.7	32.95	9.10	10.0	29.16	30	2.00
M22 x 1.5	SW 32	22	23.80	29.5	35.03	9.90	11.0	31.00	32	1.50
M24 x 1.5	SW 36	24	25.90	33.2	39.55	10.90	12.0	35.00	36	1.50
M24 x 2	SW 36	24	25.90	33.2	39.55	10.90	12.0	35.00	36	2.00
M27 x 1.5	SW 41	27	29.20	38.0	45.20	12.40	13.5	40.00	41	1.50
M27 x 2	SW 41	27	29.20	38.0	45.20	12.40	13.5	40.00	41	2.00
M30 x 1.5	SW 46	30	32.40	42.7	50.85	13.90	15.0	45.00	46	1.50
M30 x 2	SW 46	30	32.40	42.7	50.85	13.90	15.0	45.00	46	2.00
M33 x 1.5	SW 50	33	35.60	46.6	55.37	15.40	16.5	49.00	50	1.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.