DIN 439 similar to ISO 4035


Hexagon nuts

Low version | Form B: with chamfer



Brass | nickel-plated | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | different spanner widths for M10, M12, M14 and M22 | only the regular thread is included in ISO 4035 | the fine thread was transferred to ISO 8675

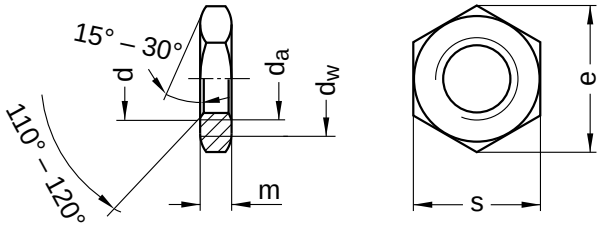

Diameter	Tool	d_a		d_w	e	m		s		Pitch
(d)	size	min.	max.	min.	min.	min.	max.	min.	max.	(P)
M3	SW 5,5	3	3.45	4.6	6.01	1.55	1.8	5.32	5.5	0.50
M4	SW 7	4	4.60	5.9	7.66	1.95	2.2	6.78	7.0	0.70
M5	SW 8	5	5.75	6.9	8.79	2.45	2.7	7.78	8.0	0.80
M6	SW 10	6	6.75	8.9	11.05	2.90	3.2	9.78	10.0	1.00
M8	SW 13	8	8.75	11.6	14.38	3.70	4.0	12.73	13.0	1.25
M10	SW 17	10	10.80	15.6	18.90	4.70	5.0	16.73	17.0	1.50
M12	SW 19	12	13.00	17.4	21.10	5.70	6.0	18.67	19.0	1.75
M16	SW 24	16	17.30	22.5	26.75	7.42	8.0	23.67	24.0	2.00

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.