DIN 965 similar to ISO 7046


Countersunk bolts

Cross-slot phillips

Stainless steel A4 | Cr(VI)-free | Metric thread

Further information: DIN standard has been withdrawn



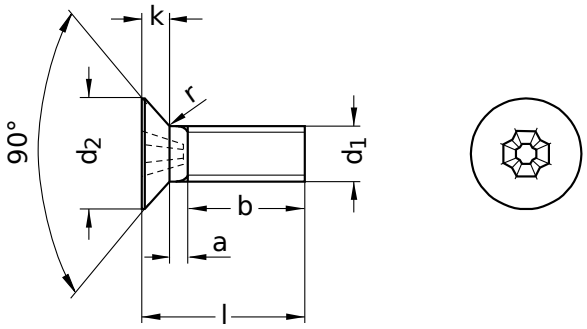

Diameter (d)	Tool size	a max.	b nominal size	d_1 nominal size	d_2 nominal size	k max.	r max.	Pitch (P)
M2.5	H1	0.9	18	M 2.5	4.7	1.50	0.7	0.45
M2.5				M2.5	4.7			
M3	H1	1.0	19	M3	5.6	1.65	0.8	0.50
M4	H2	1.4	22	M4	7.5	2.20	1.0	0.70
M4				M4	7.5			
M5	H2	1.6	25	M5	9.2	2.50	1.3	0.80
M6	H3	2.0	28	M6	11	3.00	1.6	1.00
M8	H4	2.5	34	M8	14.5	4.00	2.0	1.25

Length (l)			Length (l)		
nominal size	min.	max.	nominal size	min.	max.
4	3.75	4.25	20	19.60	20.40
6	5.75	6.25	22	21.60	22.40
8	7.70	8.30	25	24.60	25.40
10	9.70	10.30	30	29.60	30.40
12	11.65	12.35	35	34.50	35.50
14	13.65	14.35	40	39.50	40.50
16	15.65	16.35	45	44.50	45.50
18	17.65	18.35	50	49.50	50.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 965 similar to ISO 7046

Countersunk bolts

Cross-slot phillips

Stainless steel A4 | Cr(VI)-free | Metric thread

Diameter	Length (l)															
(d)	4	6	8	10	12	14	16	18	20	22	25	30	35	40	45	50
M2.5	●			●												
M3		●	●		●											
M4		●	●	●	●	●	●	●	●	●	●	●	●	●		
M5			●	●	●	●	●		●		●	●				
M6					●		●		●		●	●	●	●	●	●
M8												●	●	●	●	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.