DIN 94 similar to ISO 1234


Split pins

Threaded end ≈ 1,25 d

Stainless steel A2 | Cr(VI)-free

Further information: DIN-standard has been withdrawn



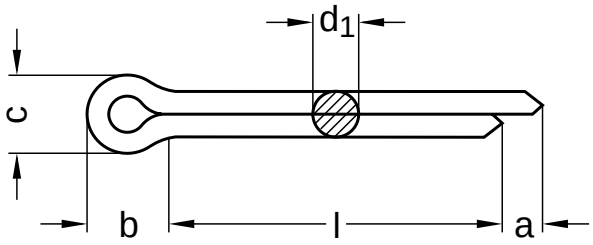

Diameter (d)	a		b	c		d_1		
	min.	max.	nominal size	min.	max.	nominal size	min.	max.
1.6	1.25	2.5	3.2	2.4	2.8	1.6	1.3	1.4
2	1.25	2.5	4.0	3.2	3.6	2	1.7	1.8
2.5	1.25	2.5	5.0	4.0	4.6	2.5	2.1	2.3
3.2	1.60	3.2	6.4	5.1	5.8	3.2	2.7	2.9
4	2.00	4.0	8.0	6.5	7.4	4	3.5	3.7
5	2.00	4.0	10.0	8.0	9.2	5	4.4	4.6
6.3	2.00	4.0	12.6	10.3	11.8	6.3	5.7	5.9
8	2.00	4.0	16.0	13.1	15.0	8	7.3	7.5

Length (l)		
nominal size	min.	max.
10	9.25	10.75
12	11.10	12.90
14	13.10	14.90
16	15.10	16.90
18	17.10	18.90
20	19.00	21.00
22	21.00	23.00
25	24.00	26.00
28	27.00	29.00
32	30.75	33.25

Length (l)		
nominal size	min.	max.
36	34.75	37.25
40	38.75	41.25
45	43.75	46.25
50	48.75	51.25
56	54.50	57.50
63	61.50	64.50
80	78.50	81.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 94 similar to ISO 1234

Split pins

Threaded end ≈ 1,25 d

Stainless steel A2 | Cr(VI)-free

Diameter	Length (l)															
(d)	10	12	14	16	18	20	22	25	28	32	36	40	45	50	56	63	80
1.6	●	●	●	●	●	●											
2	●	●	●	●	●	●	●	●			●						
2.5				●	●	●	●	●	●		●						
3.2				●	●	●	●	●	●								
4								●	●	●	●	●	●	●			
5									●	●	●	●	●	●	●	●	
6.3													●		●		
8																	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.