
DIN 7976 similar to ISO 1479


Tapping screws

Hexagon head | form C: with cone point

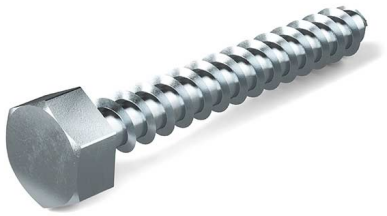

Steel | zinc-plated | Cr(VI)-free | Thread type ST (sheet metal)

Further information: DIN-standard has been withdrawn | differing height of head

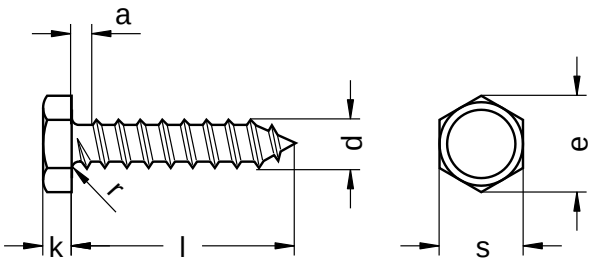

Diameter (d)	Tool size	a max.	k nominal size	k min.	k max.	e min.	r max.	s min.	s max.	Pitch (P)
2.9	SW 5	1.1	1.5	1.38	1.62	5.40	0.4	4.82	5.0	1.1
3.5	SW 5,5	1.3	2.3	2.18	2.42	5.96	0.5	5.32	5.5	1.3
3.9	SW 7	1.3	2.3	2.18	2.42	7.59	0.5	6.78	7.0	1.3
4.2	SW 7	1.4	2.8	2.68	2.92	7.59	0.6	6.78	7.0	1.4
4.8	SW 8	1.6	3.0	2.88	3.12	8.71	0.7	7.78	8.0	1.6
5.5	SW 8	1.8	4.0	3.85	4.15	8.71	0.8	7.78	8.0	1.8
6.3	SW 10	1.8	4.8	4.65	4.95	10.95	0.9	9.78	10.0	1.8
8	SW 13	2.1	5.8	5.65	5.95	14.26	1.1	12.73	13.0	2.1

Length (l) nominal size	Length (l) min.	Length (l) max.
9.5	8.7	10.3
13.0	12.2	13.8
16.0	15.2	16.8
19.0	18.2	19.8
22.0	21.2	22.8
25.0	24.2	25.8

Length (l) nominal size	Length (l) min.	Length (l) max.
32.0	30.7	33.3
38.0	36.7	39.3
45.0	43.7	46.3
50.0	48.7	51.3

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 7976 similar to ISO 1479

Tapping screws

Hexagon head | form C: with cone point

Steel | zinc-plated | Cr(VI)-free | Thread type ST (sheet metal)

Diameter	Length (l)									
(d)	9.5	13	16	19	22	25	32	38	45	50
2.9		●	●							
3.5	●	●	●							
3.9	●	●	●							
4.2		●	●	●						
4.8	●	●	●	●	●	●				
5.5					●	●	●			
6.3		●	●	●	●	●	●	●	●	●
8			●	●	●	●	●			

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.