DIN 939


Studs

Threaded end ≈ 1,25 d

Steel 8.8 | bright | Cr(VI)-free | Metric thread



Einschraubende Mutterende

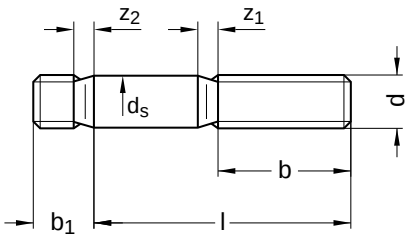

Diameter (d)	b			b_1	Pitch	z_2	z_1
	l up to 125	l up to 200	l longer than 200	nominal size	(P)		
M5	16	22	–	6.5	0.80	1.00	2
M6	18	24	–	7.5	1.00	1.25	2.5
M8	22	28	–	10.0	1.25	1.60	3.2
M10	26	32	45	12.0	1.50	1.90	3.8
M12	30	36	49	15.0	1.75	2.20	4.3
							4.3
M16	38	44	57	20.0	2.00	2.50	5
M20	46	52	65	25.0	2.50	3.20	6.3
							6.3

Length (l)		
nominal size	min.	max.
20	19.58	20.42
25	24.58	25.42
30	29.58	30.42
35	34.50	35.50
40	39.50	40.50
45	44.50	45.50

Length (l)		
nominal size	min.	max.
50	49.50	50.50
55	54.40	55.60
60	59.40	60.60
65	64.40	65.60
70	69.40	70.60
80	79.40	80.60

Length (l)		
nominal size	min.	max.
90	89.30	90.70
100	99.30	100.70
110	109.30	110.70
120	119.30	120.70
130	129.20	130.80
150	149.20	150.80

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 939

Studs

Threaded end ≈ 1,25 d

Steel 8.8 | bright | Cr(VI)-free | Metric thread

Diameter	Length (l)																
(d)	20	25	30	35	40	45	50	55	60	65	70	80	90	100	110	120	130	150
M5						●												
M6		●	●	●	●													
M8	●	●	●	●	●	●	●				●							
M10	●	●	●	●	●	●	●	●		●	●	●	●	●				
M12		●	●	●	●	●	●		●			●				●		
M16							●	●	●	●	●		●			●	●	
M20										●		●	●	●	●		●	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.