DIN 439 similar to ISO 4035


Hexagon nuts

Low version | Form B: with chamfer



Stainless steel A4 | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | different spanner widths for M10, M12, M14 and M22 | only the regular thread is included in ISO 4035 | the fine thread was transferred to ISO 8675

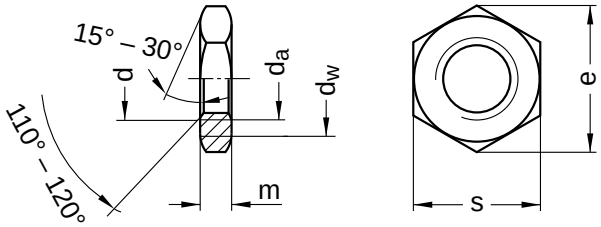

Diameter	Tool	d_a		d_w	e	m		s		Pitch
(d)	size	min.	max.	min.	min.	min.	max.	min.	max.	(P)
M2.5	SW 5	2.5	2.90	4.1	5.45	1.35	1.6	4.82	5.0	0.45
M3	SW 5,5	3.0	3.45	4.6	6.01	1.55	1.8	5.32	5.5	0.50
M4	SW 7	4.0	4.60	5.9	7.66	1.95	2.2	6.78	7.0	0.70
M5	SW 8	5.0	5.75	6.9	8.79	2.45	2.7	7.78	8.0	0.80
M6	SW 10	6.0	6.75	8.9	11.05	2.90	3.2	9.78	10.0	1.00
M8	SW 13	8.0	8.75	11.6	14.38	3.70	4.0	12.73	13.0	1.25
M10	SW 17	10.0	10.80	15.6	18.90	4.70	5.0	16.73	17.0	1.50
M12	SW 19	12.0	13.00	17.4	21.10	5.70	6.0	18.67	19.0	1.75
M14	SW 22	14.0	15.10	20.5	24.49	6.42	7.0	21.67	22.0	2.00
M16	SW 24	16.0	17.30	22.5	26.75	7.42	8.0	23.67	24.0	2.00
M18	SW 27	18.0	19.50	24.9	29.56	8.42	9.0	26.16	27.0	2.50
M20	SW 30	20.0	21.60	27.7	32.95	9.10	10.0	29.16	30.0	2.50
M22	SW 32	22.0	23.80	29.5	35.03	9.90	11.0	31.00	32.0	2.50
M24	SW 36	24.0	25.90	33.2	39.55	10.90	12.0	35.00	36.0	3.00
M27	SW 41	27.0	29.20	38.0	45.20	12.40	13.5	40.00	41.0	3.00
M30	SW 46	30.0	32.40	42.7	50.85	13.90	15.0	45.00	46.0	3.50
M30 x 2	SW 46	30.0	32.40	42.7	50.85	13.90	15.0	45.00	46.0	2.00

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.