DIN 7982 similar to ISO 7050


Sheet metal screws

Countersunk head | Cruciform drive H (Phillips) | Form C with tip



Steel | zinc-plated | Cr(VI)-free | Thread type ST (sheet metal)

Note: DIN standard has been withdrawn | Head dimensions changed for ISO standard

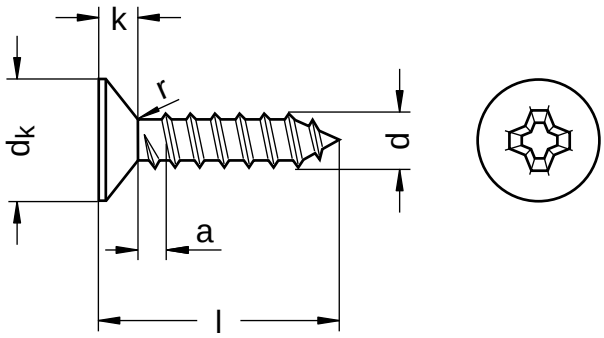

Diameter (d)	Tool size	a max.	d_k min.	d_k max.	k	r max.	Pitch (P)
2.2	H1	0.8	4.00	4.3	1.3	0.8	0.8
2.9	H1	1.1	5.20	5.5	1.7	1.1	1.1
3.5	H2	1.3	6.44	6.8	2.1	14.0	1.3
3.9	H2	1.3	7.14	7.5	2.3	1.5	1.3
4.2	H2	1.4	7.74	8.1	2.5	1.8	1.4
4.8	H2	1.6	9.14	9.5	3.0	1.9	1.6
5.5	H3	1.8	10.37	10.8	3.4	2.1	1.8
6.3	H3	1.8	11.97	12.4	3.8	2.4	1.8

Length (l)		
nominal size	min.	max.
6.5	5.7	7.3
9.5	8.7	10.3
13.0	12.2	13.8
16.0	15.2	16.8
19.0	18.2	19.8
22.0	21.2	22.8

Length (l)		
nominal size	min.	max.
25.0	24.2	25.8
32.0	30.7	33.3

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 7982 similar to ISO 7050

Sheet metal screws

Countersunk head | Cruciform drive H (Phillips) | Form C with tip

Steel | zinc-plated | Cr(VI)-free | Thread type ST (sheet metal)

Diameter	Length (l)							
(d)	6.5	9.5	13	16	19	22	25	32
2.2	●	●	●	●				
2.9	●	●	●	●	●			
3.5		●	●	●	●	●	●	
3.9		●	●	●	●	●	●	
4.2		●	●	●	●	●	●	●
4.8			●	●	●	●	●	●
5.5				●	●	●	●	
6.3								●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.