22-0-50 Sliding hammer device with 340 mm impact stroke, 5 kg impact weight



DESCRIPTION

The sliding hammer devices of series 22-0 are used in conjunction with internal extractors of series 21 in crafts, industry, and workshops. The use of a sliding hammer is recommended especially when no support surface is available or if it is too delicate. The ergonomically shaped, massive sliding piece optimally transfers the applied force and achieves a strong shock effect. This also ensures a contactless and gentle extraction. Depending on the application, sliding hammers are available in various sizes and with impact weights ranging from 500 g to 8 kg along with suitable accessories.

APPLICATION AREA

Together with internal extractors of series 21 in craftsmanship, industry, and workshop.

BENEFIT

- The shape of the sliding piece allows for a high impact weight of the sliding hammer with simple application.
- The internal stop point prevents crushing and ensures a safe working process.
- If there is not enough space, the impact weight can be turned over.

OPERATION

- Determine the inner diameter of the ball bearing and choose the appropriate internal extractor
- Insert the internal extractor into the hole and tighten the clamping nut
- Screw the sliding hammer rod onto the wedge spindle of the internal extractor
- Use the sliding hammer with a striking motion to pull the bearing out

MASTER DATA

GTIN [GTIN]	4021176385094
Country of origin	DE
Material	Tool steel
Series	22-0
Gross weight [kg]	8,83 kg
Package contents	1 piece
Packaging Act	PAPPE PAP 21
Worldwide sales capability	Yes (REACH, RoHS, POP, PROP65, TSCA)

APPLICATION IMAGE



DETAIL IMAGE



Sliding hammer device with 340 mm impact stroke, 5 kg impact weight

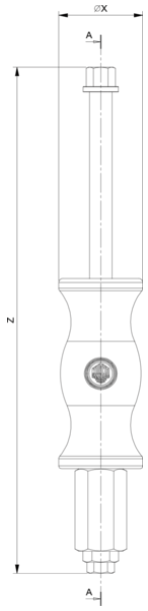

Abbreviation	Attribut	Wert
X	Diameter [mm]	95 mm
S2	Width across flats Thread adapter [mm]	41 mm
T2	Internal thread of the thread adapter [mm]	G 3/4
T3	Female thread of connecting nut [mm]	G 1/2
A	Impact distance [mm]	340 mm
S1	Width across flats connecting nut [mm]	32 mm

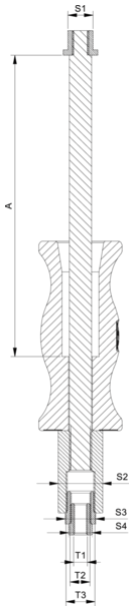

Abbreviation	Attribut	Wert
X	Diameter [mm]	95 mm
S2	Width across flats Thread adapter [mm]	41 mm
T2	Internal thread of the thread adapter [mm]	G 3/4
T3	Female thread of connecting nut [mm]	G 1/2
A	Impact distance [mm]	340 mm
S1	Width across flats connecting nut [mm]	32 mm

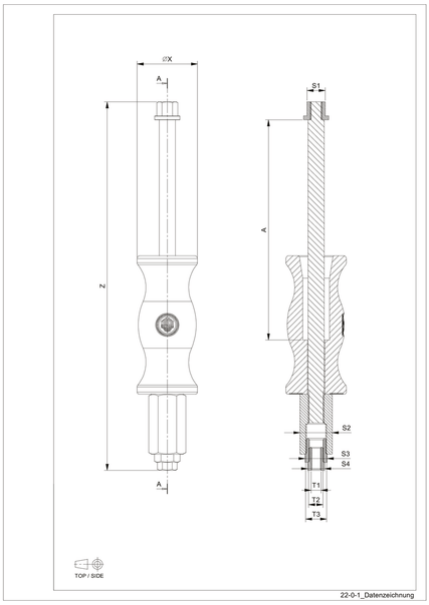

Abbreviation	Attribut	Wert
X	Diameter [mm]	95 mm
S2	Width across flats Thread adapter [mm]	41 mm
T2	Internal thread of the thread adapter [mm]	G 3/4
T3	Female thread of connecting nut [mm]	G 1/2
A	Impact distance [mm]	340 mm
S1	Width across flats connecting nut [mm]	32 mm