Varibulb high strength blind rivets

Dome head

Note: stainless steel A2 body and stainless steel A2 mandrel

Technical information can be found on the last page.




Diameter (d)		d_1 nominal size	d_2 nominal size	Drilling diameter d nominal size	e min.	e max.
3.2		3.2	6.3	3.3 - 3.4	1.0	3.0
3.2		3.2	6.3	3.3 - 3.4	3.0	5.0
3.2		3.2	6.3	3.3 - 3.4	5.0	7.0
4		4	8	4.1 - 4.3	3.0	5.0
4		4	8	4.1 - 4.3	1.0	3.0
4.8		4.8	9.6	4.9 - 5.1	1.5	3.5
4.8		4.8	9.5	5.0 - 5.2	1.5	3.5
4.8		4.8	9.6	4.9	6.0	8.5
4.8		4.8	9.5	5.0 - 5.2	3.5	5.5
4.8		4.8	9.5	5.0 - 5.2	5.5	7.5
4.8		4.8	9.6	4.9	3.5	6.0
6.4		6.4	13	6.6 - 7.0	2.0	6.0
6.4		6.4	13.4	6.6	5.0	9.0
6.4		6.4	13	6.6 - 7.0	5.0	9.0
6.4		6.4	13.4	6.6	1.5	5.5

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3.2	6.5	0.9	1600	2000
9.0	0.9	1700	2000	
11.5	0.9	3200	2000	
4	9.5	1.2	5200	4000
7.5	1.2	2800	4000	
4.8	9.0	1.4	5500	5000
13.5	1.4	3900 - 5000	5300	
14.5	1.5	5500	5000	
16.5	1.4	3900 - 5000	5300	
19.5	1.4	3900 - 5000	5300	
11.5	1.5	5500	5000	
6.4	17.5	2.0	7500 - 15000	8500
160.5	3.1	14300	8000	
20.5	2.0	7500 - 15000	8500	
13.0	3.1	14300	8000	

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

Symbol list

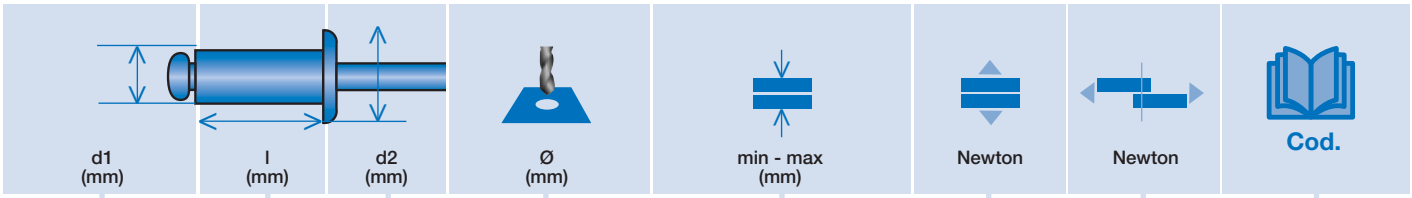

Body diameter

Length of the body

Head diameter

Hole diameter

Min. and max. grip range

Tensile strength

Shear Strength

Item code

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.