DIN 7982 similar to ISO 7050


Sheet metal screws

Countersunk head | Cruciform drive H (Phillips) | Form C with tip



Stainless steel A2 | Cr(VI)-free | Thread type ST (sheet metal)

Note: DIN standard has been withdrawn | Head dimensions changed for ISO standard

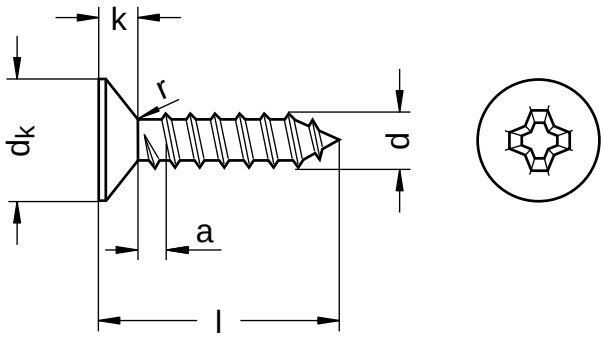

Diameter (d)	Tool size	a max.	d_k min.	d_k max.	k nominal size	r max.	Pitch (P)
2.2	H1	0.8	4.00	4.3	1.3	0.8	0.8
2.9	H1	1.1	5.20	5.5	1.7	1.1	1.1
3.5	H2	1.3	6.44	6.8	2.1	14.0	1.3
3.9	H2	1.3	7.14	7.5	2.3	1.5	1.3
4.2	H2	1.4	7.74	8.1	2.5	1.8	1.4
4.8	H2	1.6	9.14	9.5	3.0	1.9	1.6
6.3	H3	1.8	11.97	12.4	3.8	2.4	1.8

Length (l)		
nominal size	min.	max.
6.5	5.7	7.3
9.5	8.7	10.3
13.0	12.2	13.8
16.0	15.2	16.8
19.0	18.2	19.8
22.0	21.2	22.8

Length (l)		
nominal size	min.	max.
25.0	24.2	25.8
32.0	30.7	33.3
38.0	36.7	39.3

Diameter (d)	Length (l) 6.5	9.5	13	16	19	22	25	32	38
2.2	●	●	●	●					
2.9	●	●	●	●	●				
3.5	●	●	●	●	●	●	●		
3.9		●	●	●	●	●	●		
4.2		●	●	●	●	●	●	●	
4.8		●	●	●	●	●	●	●	
6.3							●		●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.