DIN 980 similar to ISO 7042


Hexagon nuts

With clamping part | all metal | form V: one-piece

Steel 8 | zinc-plated, thick-film passivated (VZD) | Cr(VI)-free | Metric thread

Further information: DIN standard has been withdrawn | modified nut height and wrench width



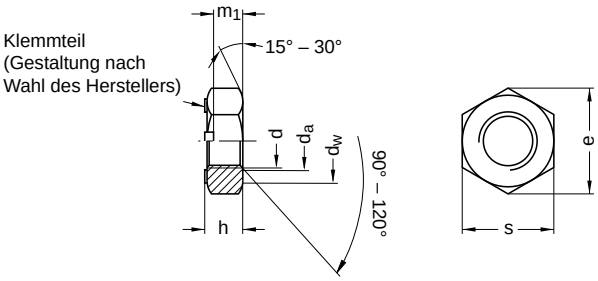

Diameter	Tool	d_a		d_w	h		m_1	e	s		Pitch
(d)	size	min.	max.	min.	min.	max.	min.	min.	min.	max.	(P)
M6	SW 10	6	6.75	8.9	5.7	6	3.3	11.05	9.78	10	1.00
M8	SW 13	8	8.75	11.6	7.5	8	4.4	14.38	12.73	13	1.25
M10	SW 17	10	10.80	15.6	9.0	10	5.5	18.90	16.73	17	1.50
M12	SW 19	12	13.00	17.4	11.0	12	6.6	21.10	18.67	19	1.75
M14	SW 22	14	15.10	20.5	12.0	14	7.7	24.49	21.67	22	2.00
M16	SW 24	16	17.30	22.5	14.0	16	8.8	26.75	23.67	24	2.00
M20	SW 30	20	21.60	27.7	18.0	20	11.0	32.95	29.16	30	2.50
M24	SW 36	24	25.90	33.2	22.0	24	13.2	39.55	35.00	36	3.00

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.