
ISO 4032 similar to DIN 934

Hexagon nuts



Steel 8 | zinc-plated | Cr(VI)-free | Metric thread

Further information: ISO-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22 | changed head height | the fine thread has been transferred to ISO 8673

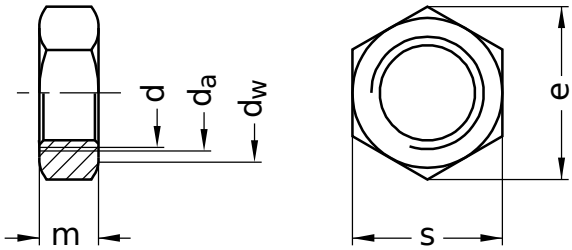

Diameter (d)	Tool size	d_a min.	d_a max.	d_w min.	e min.	m min.	m max.	s min.	s max.	Pitch (P)
M3	SW 5,5	3	3.45	4.6	6.01	2.15	2.4	5.32	5.5	0.50
M4	SW 7	4	4.60	5.9	7.66	2.90	3.2	6.78	7.0	0.70
M5	SW 8	5	5.75	6.9	8.79	4.40	4.7	7.78	8.0	0.80
M6	SW 10	6	6.75	8.9	11.05	4.90	5.2	9.78	10.0	1.00
M8	SW 13	8	8.75	11.6	14.38	6.44	6.8	12.73	13.0	1.25
M10	SW 16	10	10.80	14.6	17.77	8.04	8.4	15.73	16.0	1.50
M12	SW 18	12	13.00	16.6	20.03	10.37	10.8	17.73	18.0	1.75
M14	SW 21	14	15.10	19.6	23.36	12.10	12.8	20.67	21.0	2.00
M16	SW 24	16	17.30	22.5	26.75	14.10	14.8	23.67	24.0	2.00
M18	SW 27	18	19.50	24.9	29.56	15.10	15.8	26.16	27.0	2.50
M20	SW 30	20	21.60	27.7	32.95	16.90	18.0	29.16	30.0	2.50
M22	SW 34	22	23.70	31.4	37.29	18.10	19.4	33.00	34.0	2.50
M24	SW 36	24	25.90	33.3	39.55	20.20	21.5	35.00	36.0	3.00
M27	SW 41	27	29.10	38.0	45.20	22.50	23.8	40.00	41.0	3.00
M30	SW 46	30	32.40	42.8	50.85	24.30	25.6	45.00	46.0	3.50
M33	SW 50	33	35.60	46.6	55.37	27.40	28.7	49.00	50.0	3.50
M36	SW 55	36	38.90	51.1	60.79	29.40	31.0	53.80	55.0	4.00
M48	SW 75	48	51.80	69.5	82.60	36.40	38.0	73.10	75.0	5.00
M56	SW 85	56	60.50	78.7	93.56	43.40	45.0	82.80	85.0	5.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.