DIN 1480 A


Turnbuckle nuts

Forged | with two weld stud ends | left and right-hand thread



Steel | zinc-plated | Cr(VI)-free

Further information: DIN 1480 turnbuckle nuts are to be assembled with DIN 34828 welding ends made of the same material.

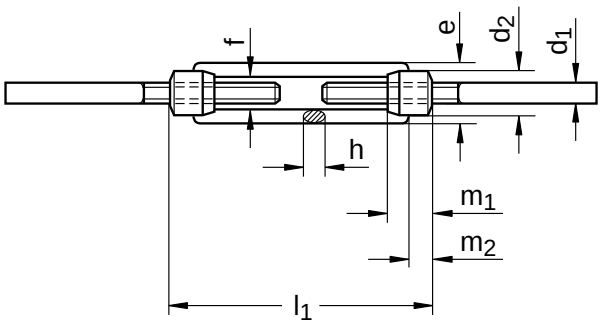

Diameter (d)	d_1 nominal size	d_2 nominal size	d_2 min.	d_2 max.	e nominal size	e max.	e min.	f nominal size	h min.	l_1	m_1 nominal size	m_2	Pitch (P)
M6	M 6	12	11.5	12.9	19	19.9	18.5	9	6	110	12	6	1.00
M8	M 8	15	14.5	15.9	23	23.9	22.5	11	8	110	15	8	1.25
M10	M 10	18	17.5	18.9	30	30.9	29.5	14	9	125	18	9	1.50
M12	M 12	21	20.5	21.9	34	35.1	33.5	16	11	125	21	11	1.75
M16	M 16	27	26.5	27.9	42	43.1	41.5	20	14	170	27	14	2.00
M20	M 20	34	33.5	35.1	52	53.1	51.5	24	17	200	34	17	2.50
M24	M 24	39	38.5	40.1	60	61.1	59.5	28	20	255	39	20	3.00
M30	M 30	45	44.4	46.2	74	75.2	73.4	34	23	255	45	23	3.50

Length (l) nominal size
110
125

Length (l) nominal size
170
200
255

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 1480 A

Turnbuckle nuts

Forged | with two weld stud ends | left and right-hand thread

Steel | zinc-plated | Cr(VI)-free

Diameter (d)	Length (l) 110	125	170	200	255
M6	●				
M8	●				
M10		●			
M12		●			
M16			●		
M20				●	
M24					●
M30					●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.