
DIN 938


Studs

Threaded end ≈ 1 d

Steel 8.8 | bright | Cr(VI)-free | Metric thread

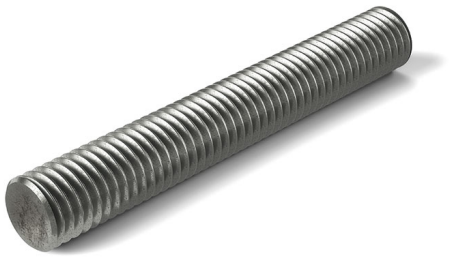

Einschraubende Mutterende

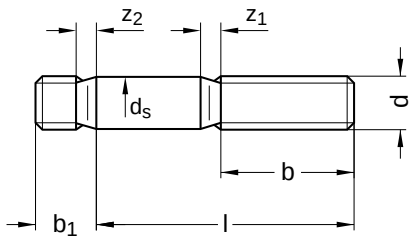

Diameter (d)	b			b_1	d_s		z_2	z_1
	l up to 125	l up to 200	l longer than 200	nominal size	min.	max.		
M6	18	24	–	6	5.82	6	1.25	2.5
M8	22	28	–	8	7.78	8	1.60	3.2
M10	26	32	45	10	9.78	10	1.90	3.8
M12	30	36	49	12	11.73	12	2.20	4.3
M16	38	44	57	16	15.73	16	2.50	5
M20	46	52	65	20	19.67	20	3.20	6.3
M24	54	60	73	24	23.67	24	3.80	7.5

Length (l)		
nominal size	min.	max.
25	24.58	25.42
30	29.58	30.42
35	34.50	35.50
40	39.50	40.50
45	44.50	45.50
50	49.50	50.50
55	54.40	55.60
60	59.40	60.60

Length (l)		
nominal size	min.	max.
65	64.40	65.60
70	69.40	70.60
75	74.40	75.60
80	79.40	80.60
90	89.30	90.70

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

DIN 938

Studs

Threaded end ≈ 1 d

Steel 8.8 | bright | Cr(VI)-free | Metric thread

Diameter	Length (l)											
(d)	25	30	35	40	45	50	55	60	65	70	75	80	90
M6	●	●	●										
M8	●	●	●	●	●								
M10			●	●	●	●		●		●			●
M12			●	●	●	●	●	●	●				
M16						●	●	●	●	●	●	●	
M20									●				
M24											●		

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.