DIN 6798 I


Serrated lock washers

Form I: internally toothed



Stainless steel A4 | Cr(VI)-free

Further information: Norm has been withdrawn without replacement

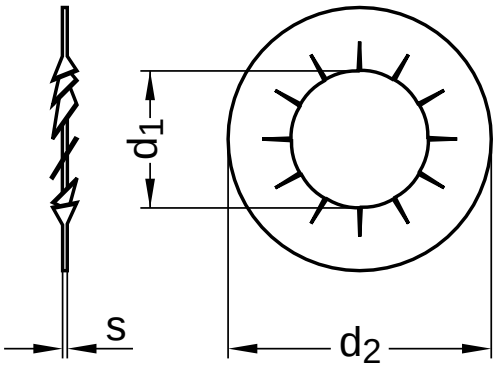

Diameter (d)	d_1 min.	d_1 max.	d_2 min.	d_2 max.	s nominal size
5.3	5.3	5.48	9.64	10.0	0.6
6.4	6.4	6.62	10.57	11.0	0.7
10.5	10.5	10.77	17.57	18.0	0.9
13	13.0	13.27	19.98	20.5	1.0
15	15.0	15.27	23.48	24.0	1.0

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.