200-1 2-jaw Universal Puller "Economy" with multipurpose jaws, up to 250 mm spread, reach up to 180 mm



APPLICATION IMAGE



DETAIL IMAGE



DESCRIPTION

The 2-jaw universal puller “Economy” with a versatile combination puller jaw set is used for pulling bearings, gears, and discs in all common sizes in agriculture and workshops. It can loosen any component that is on a shaft and is freely accessible from the outside. The different lengths of the puller jaws allow the puller to be individually adjusted to the respective reach.

APPLICATION AREA

To remove bearings, gears, and discs in all common sizes in agriculture and workshops.

BENEFIT

- Multifunctional use thanks to four different pairs of jaws for individual adjustment to the respective reach
- Optional convertible from an external puller to an internal extractor by reversing the jaws.
- Secure attachment of the spindle through a rotatable spindle tip on both smooth surfaces and during centering (Switch Technology)
- Anti-slip safety (spindle neck) at the spindle head for safe working with a wrench.
- Spindle outlet to protect the thread
- Adjustment scale for even adjusting the jaws

OPERATION

- Place the puller jaws from the outside onto the part to be removed
- Slide the claws under the component
- Manually pull the spindle to lock it in place
- Use a ratchet or a ring spanner to turn the hexagon on the spindle head until the component is loosened

MASTER DATA

GTIN [GTIN]	4021176025686
Country of origin	DE
Material	Tool steel
Series	200-1
Gross weight [kg]	1,2 kg
Package contents	1 piece
Packaging Act	PAPPE PAP 21
Worldwide sales capability	Yes (REACH, RoHS, POP, PROP65, TSCA)

SPARE PARTS

- 200-U-120B-P_2 jaws (pair)
- 200-U-180C-P_2 jaws (pair)
- 200-U-180D-P_2 jaws (pair)
- 200-U-80A-P_2 jaws (pair)
- 200-U-T_Crossbar
- 620260_Two-sided spindle tip
- 621220_Mechanical pressure spindle

2-jaw Universal Puller "Economy" with multipurpose jaws, up to 250 mm spread, reach up to 180 mm

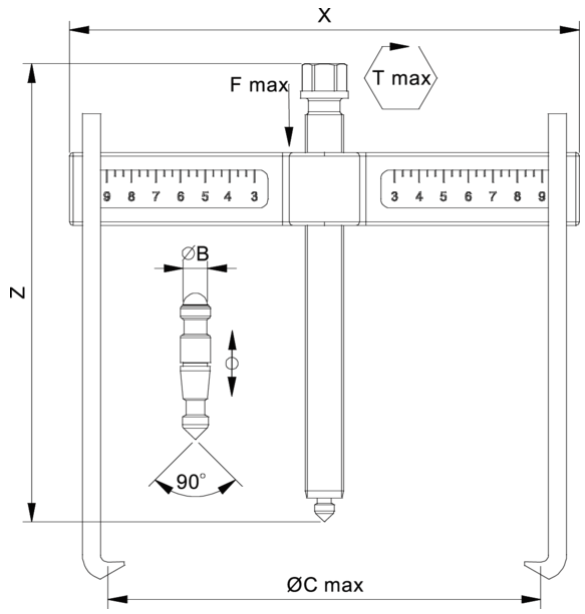

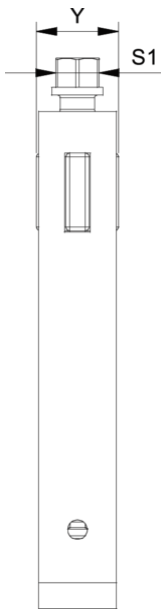

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

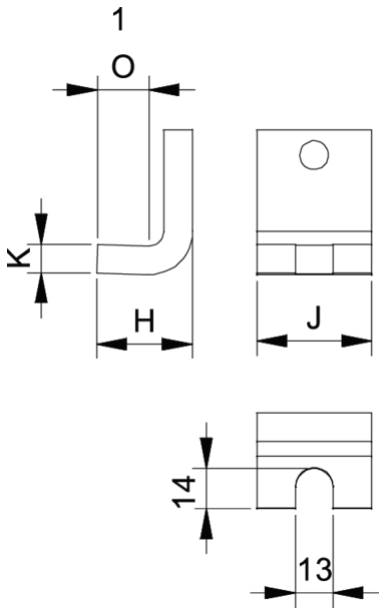

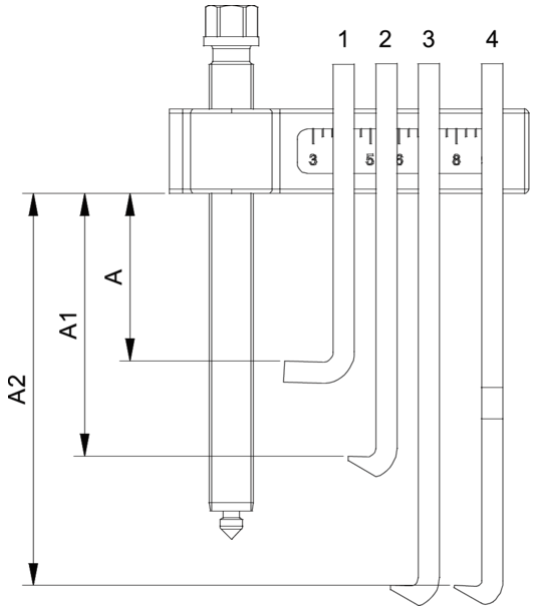

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

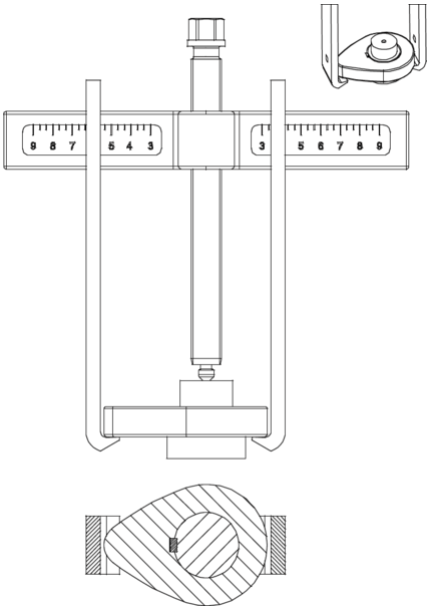

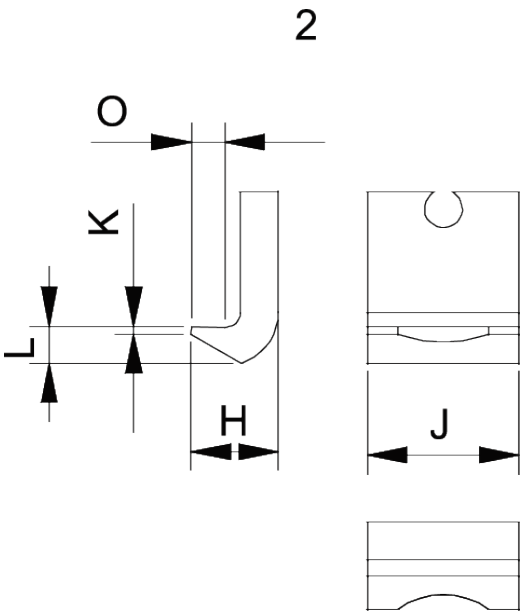

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm

Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

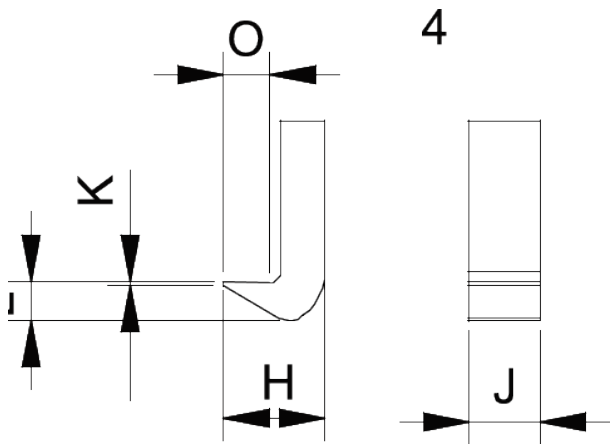

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN

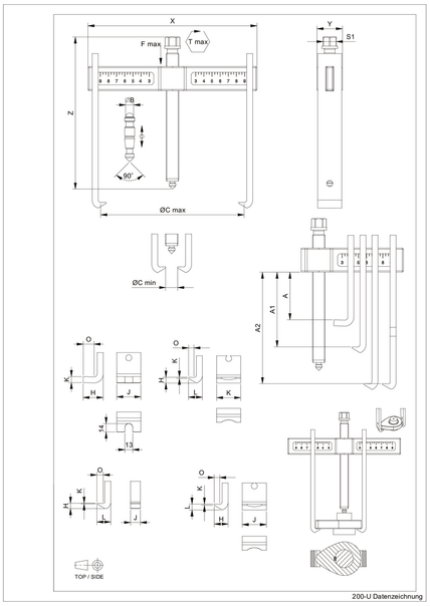

Abbreviation	Attribut	Wert
X	Total width [mm]	280 mm
Y	Total depth [mm]	42 mm
Z	Total height [mm]	240 mm
A	Clamping depth of external puller [mm]	585 mm
S1	Width across flats [mm]	22 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
A1	Clamping depth of external pull-off A1 [mm]	120 mm
A2	Clamping depth outside pull-off A2 [mm]	180 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	1 mm
J	Hook base width (claw width J) [mm]	40 mm
O	Hook base depth usable (claw depth usable O) [mm]	13 mm
H	Total hook root depth (total claw depth H) [mm]	23 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	10 mm
Tmax	Max. torque [Nm]	120 Nm
Fmax	Max. tractive force [t]	5 t
Fmax	Max. tensile force [kN]	50 kN