DIN 982 similar to ISO 7040


Hexagon nuts

With clamping part | non-metallic insert | high form



Steel 10 | zinc-plated, thick-film passivated (VZD) | Cr(VI)-free | Metric thread

Further information: DIN standard has been withdrawn | modified nut height and wrench width

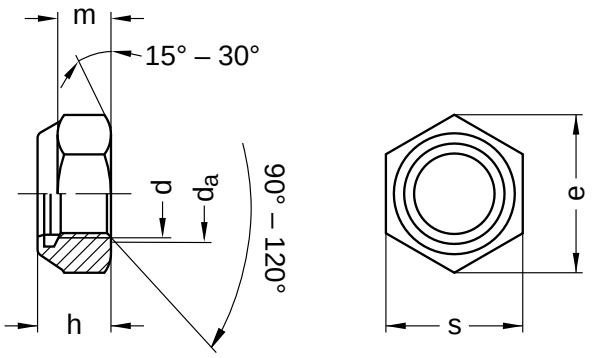

Diameter (d)	Tool size	d_a min.	d_a max.	h min.	h max.	e min.	m min.	s min.	s max.	Pitch (P)
M10	SW 17	10	10.8	11.14	11.5	18.90	8.04	16.73	17	1.50
M12	SW 19	12	13.0	13.64	14.0	21.10	10.37	18.67	19	1.75
M16	SW 24	16	17.3	17.30	18.0	26.75	14.10	23.67	24	2.00
M20	SW 30	20	21.6	20.70	22.0	32.95	16.90	29.16	30	2.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.