Standard rivets

Dome head

Note: aluminium body and steel mandrel

Technical information can be found on the last page.



Diameter (d)		d_1 nominal size	d_2 nominal size	Drilling diameter d nominal size	e min.	e max.
2.4		2.4	5	2.5 - 2.6	6.0	8.0
2.4		2.4	5	2.5 - 2.6	8.0	10.0
2.4		2.4	5	2.5 - 2.6	4.0	6.0
2.4		2.4	5	2.5	2.0	4.0
3		3	6	3.1 - 3.2	1.0	3.5
3		3	6.5	3.1 - 3.2	7.0	9.0
3		3	6.5	3.1	5.5	7.0
3		3	6.5	3.1 - 3.2	13.0	15.0
3		3	6.5	3.1	11.0	13.0
3		3	6.5	3.1 - 3.2	9.0	11.0
3		3	6.5	3.1	3.5	5.5
3.2		3.2	6.5	3.3 - 3.4	11.0	13.0
3.2		3.2	6.5	3.3 - 3.4	7.0	9.0
3.2		3.2	6.5	3.3 - 3.4	13.0	15.0
3.2		3.2	6.5	3.3 - 3.4	15.0	17.0
3.2		3.2	6.5	3.3 - 3.4	9.0	11.0
3.2		3.2	6	3.3 - 3.4	5.5	7.0
3.2		3.2	6	3.3 - 3.4	3.5	5.5
3.2		3.2	6	3.3 - 3.4	1.0	3.5
4		4	8	4.1 - 4.2	26.0	30.0
4		4	8	4.1 - 4.2	12.5	14.5
4		4	7.5	4.1 - 4.2	10.5	12.5
4		4	8	4.1 - 4.2	5.0	6.5
4		4	8	4.1 - 4.2	16.0	18.5
4		4	7.5	4.1 - 4.2	8.5	10.5
4		4	8	4.1 - 4.2	21.5	26.0
4		4	8	4.1 - 4.2	1.0	3.0
4		4	8	4.1 - 4.2	3.0	5.0
4		4	8	4.1 - 4.2	14.5	16.5
4		4	8	4.1 - 4.2	6.5	8.5
4.8		4.8	9.5	4.9 - 5.0	15.5	18.0
4.8		4.8	9.5	4.9 - 5.0	30.0	35.0
4.8		4.8	9.5	4.9 - 5.0	21.0	25.0
4.8		4.8	9.5	4.9	1.5	25.0
4.8		4.8	9	4.9 - 5.0	4.0	6.0
4.8		4.8	9	4.9 - 5.0	8.0	10.0
4.8		4.8	9.5	4.9	12.0	14.0
4.8		4.8	9.5	4.9 - 5.0	10.0	12.0
4.8		4.8	9.5	4.9 - 5.0	14.0	16.0
4.8		4.8	9.5	4.9	25.0	30.0
4.8		4.8	9.5	4.9 - 5.0	2.5	4.0
4.8		4.8	9	4.9 - 5.0	6.0	8.0
5		5	9.5	5.1 - 5.2	4.5	6.0
5		5	9.5	5.1 - 5.2	20.0	25.0

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

Standard rivets

Dome head

Diameter (d)		d_1 nominal size	d_2 nominal size	Drilling diameter d nominal size	e min.	e max.
5		5	9.5	5.1	2.5	4.5
5		5	9.5	5.1 - 5.2	14.0	16.0
5		5	9.5	5.1 - 5.2	10.0	12.0
5		5	9.5	5.1 - 5.2	8.0	10.0
5		5	9.5	5.1 - 5.2	1.5	2.5
5		5	9.5	5.1 - 5.2	6.0	8.0
6		6	12	6.1 - 6.2	9.0	11.0
6		6	12	6.1	3.0	5.0
6		6	12	6.1	2.0	3.0
6		6	12	6.1 - 6.2	5.0	7.0
6		6	12	6.1 - 6.2	25.0	30.0
6		6	12	6.1	11.0	13.0
6		6	12	6.1	13.0	15.0
6		6	12	6.1	15.0	20.0
6		6	12	6.1	7.0	9.0
6		6	12	6.1 - 6.2	20.0	25.0
6.4		6.4	13	6.5 - 6.6	3.0	4.0
6.4		6.4	13	6.5 - 6.6	8.0	10.0
6.4		6.4	13	6.5 - 6.6	17.0	20.0
6.4		6.4	13	6.5 - 6.6	10.0	12.0
6.4		6.4	13	6.5 - 6.6	20.0	24.0
6.4		6.4	13	6.5 - 6.6	28.0	33.0
6.4		6.4	13	6.5 - 6.6	24.0	28.0
6.4		6.4	13	6.5	14.0	16.0
6.4		6.4	12.25	6.5 - 6.6	4.0	6.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
2.4	10	0.6		
12	0.6			
8	0.6			
6	0.8			
3	6	1.0		
12	0.9			
10	1.0			
18	0.9			
16	1.0			
14	0.9			
8	1.0			
3.2	16	0.9		
12	0.9			
18	0.9			
20	0.9			
14	0.9			
10	1.0			
8	1.0		350	450
6	1.0			
4	35	1.2		
18	1.2			
16	1.3			
10	1.3			
22	1.2			
14	1.3			
30	1.2			

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

Standard rivets


Dome head

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
6	1.3			
8	1.3			
20	1.2			
12	1.3			
4.8	22	1.4		
40	1.4			
30	1.4			
6	1.4			
10	1.4			
14	1.4			
18	1.4			
16	1.4			
20	1.4			
35	1.4			
8	1.4			
12	1.4			
5	10	1.4		
30	1.4			
18	1.4			
8	1.4			
20	1.4			
16	1.4			
14	1.4			
6	1.4			
12	1.4			
6	16	1.8		
10	1.9			
8	1.9			
12	1.9			
35	1.8			
18	1.9			
20	1.9			
25	1.9			
14	1.9			
30	1.8			
6.4	10	2.0		
16	2.0			
26	2.0			
18	1.8			
30	2.0			
40	2.0			
35	2.0			
22	2.2			
12	2.2			

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

Symbol list

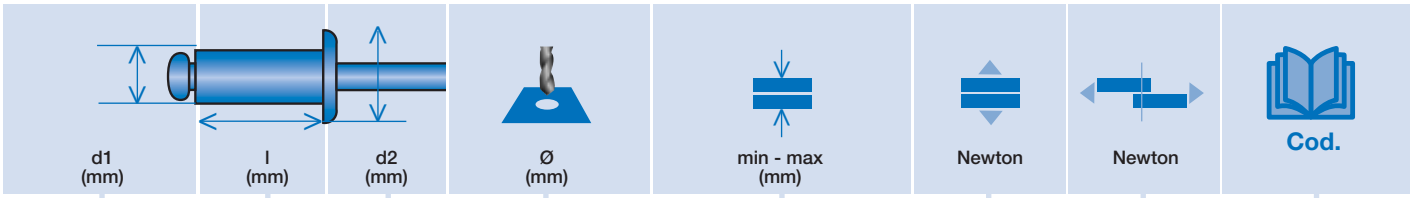

Body diameter

Length of the body

Head diameter

Hole diameter

Min. and max. grip range

Tensile strength

Shear Strength

Item code

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.