E 1413


EJOT® PT screws

Countersunk head | Cruciform drive H (Phillips)



Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

Note: Further information and CAD files can be obtained directly from EJOT:
http://www.ejot.com/industry

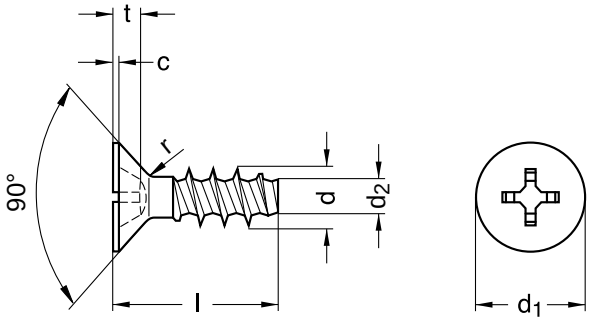

Diameter (d)	Tool size	c max.	d_1 nominal size	d_2 nominal size	r nominal size	Pitch (P)	t max.	t min.
2.2	H1	0.35	3.8	1.25	Reinforcing cone	0.98	1.25	0.95
2.5	H1	0.55	4.7	1.4	1	1.12	1.43	0.97
3	H1	0.55	5.5	1.66	1.2	1.34	1.56	1.10
3.5	H2	0.65	7.3	1.91	1.4	1.57	1.96	1.33
4	H2	0.70	8.4	2.17	1.6	1.79	2.22	1.59
5	H2	0.75	9.3	2.68	2	2.24	2.67	2.04
6	H2	0.85	11.3	3.19	2.4	2.69	3.22	2.59

Length (l)		
nominal size	min.	max.
6	5.62	6.38
8	7.55	8.45
10	9.55	10.45
12	11.45	12.55
14	13.45	14.55
16	15.45	16.55

Length (l)		
nominal size	min.	max.
18	17.45	18.55
20	19.35	20.65
22	21.35	22.65
25	24.35	25.65
30	29.35	30.65

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

E 1413

EJOT® PT screws

Countersunk head | Cruciform drive H (Phillips)

Steel 10 | zinc-plated | Cr(VI)-free | Self-tapping thread

Diameter	Length (l)										
(d)	6	8	10	12	14	16	18	20	22	25	30
2.2	●	●	●	●		●					
2.5	●	●	●	●		●		●			
3		●	●	●	●	●	●	●			
3.5		●	●	●	●	●	●	●		●	
4			●	●		●	●	●	●		
5						●					
6					●						●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.