20-30+SP 2-jaw universal puller with narrow, quick adjustment jaws in a set, up to 350 mm spread, 400 mm reach



DESCRIPTION

The 2-jaw universal puller with narrow, quickly adjustable extractor jaws is used for safely and user-friendly extracting of bearings, gears, and discs in all common sizes for craftsmanship, workshops, and industry. Equipped with three pairs of extractor jaws in various lengths, extraction processes with diverse combinations and depths are made possible. This allows for the removal of any component seated on a shaft that is freely accessible from the outside. The narrow extractor jaws ensure that tight and poorly accessible spaces can also be reached.

APPLICATION AREA

For the safe and user-friendly removal of bearings, gears, and discs in all common sizes for crafts, workshops, and industry.

BENEFIT

- Narrow jaws grip optimally in tight and hard-to-reach places.
- Easy, manual release of the trigger hooks by means of manual knurling (Quick Adjust Technology)
- Application also for eccentric components via freely movable pulling jaws gliding on the crossbar.
- Hexagonal profile on the crossbar for secure counterholding
- Quick-adjustable jaws guarantee immediate adjustment to any spread between 21 mm – 350 mm
- Shear-proof mounting of the claw in the sliding piece (Armlock Technology)
- Secure installation of the spindle with rotatable spindle tip on both smooth surfaces and in centering (Switch Technology)
- Optional convertible from an external puller to an internal puller by reversing the jaws.
- Anti-slip safety (spindle neck) at the spindle head for safe work with the wrench
- Spindle outlet to protect the thread
- By combining the hooks, a maximum clamping depth of 350 mm can be achieved
- Jaws, spindle, and crossbar have a spare part number for easy reordering.

OPERATION

- Position the puller jaws externally onto the part to be pulled off
- Slide the claws under the component
- Use the hand knob for manual fastening of the jaws
- Manually pull the spindle for fixation
- Set the hexagon on the spindle head in motion with a ratchet or a wrench until the component is loosened

APPLICATION IMAGE




MASTER DATA


GTIN [GTIN]	4021176181085
Country of origin	DE
Material	Tool steel
Series	20+SP
Gross weight [kg]	18,12 kg
Package contents	1 set
Packaging Act	PAPPE PAP 21
Worldwide sales capability	Yes (REACH, RoHS, POP, PROP65, TSCA)

SPARE PARTS

- 20-30-T crossbar for 20-30
- 3-203-P_Narrow, quick adjustment jaws (pair)
- 3-303-P_Schmale, quick-adjusting puller jaws (Pair)
- 3-403-P_Small, quick-adjustable jaws (pair)
- 626300_Mechanical spindle


2-jaw universal puller with narrow, quick adjustment jaws in a set, up to 350 mm spread, 400 mm reach

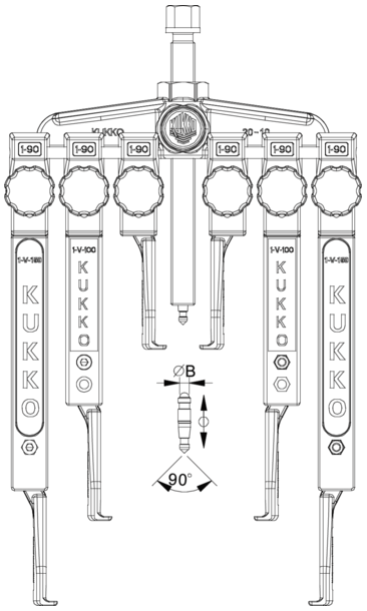

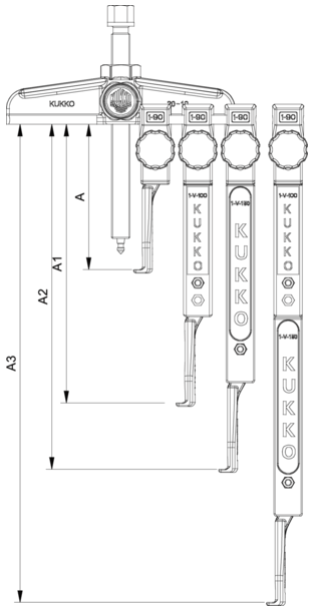

Abbreviation	Attribut	Wert
X	Total width [mm]	420 mm
Y	Total depth [mm]	67 mm
Z	Total height [mm]	337 mm
A	Clamping depth of external puller [mm]	400 mm
S1	Width across flats [mm]	27 mm
S2	Width across flats [mm]	46 mm
Cmin	Span outside pull-off (min.) [mm]	21 mm
Cmax	Span outside pull-off (max.) [mm]	350 mm
A1	Clamping depth of external pull-off A1 [mm]	300 mm
A2	Clamping depth outside pull-off A2 [mm]	400 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6,5 mm
J	Hook base width (claw width J) [mm]	35 mm
O	Hook base depth usable (claw depth usable O) [mm]	22 mm
H	Total hook root depth (total claw depth H) [mm]	52 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	6,5 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	440 mm
Tmax	Max. torque [Nm]	250 Nm
Fmax	Max. tractive force [t]	7 t
Fmax	Max. tensile force [kN]	70 kN

Abbreviation	Attribut	Wert
X	Total width [mm]	420 mm
Y	Total depth [mm]	67 mm
Z	Total height [mm]	337 mm
A	Clamping depth of external puller [mm]	400 mm
S1	Width across flats [mm]	27 mm
S2	Width across flats [mm]	46 mm
Cmin	Span outside pull-off (min.) [mm]	21 mm
Cmax	Span outside pull-off (max.) [mm]	350 mm
A1	Clamping depth of external pull-off A1 [mm]	300 mm
A2	Clamping depth outside pull-off A2 [mm]	400 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6,5 mm
J	Hook base width (claw width J) [mm]	35 mm
O	Hook base depth usable (claw depth usable O) [mm]	22 mm
H	Total hook root depth (total claw depth H) [mm]	52 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	6,5 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	440 mm
Tmax	Max. torque [Nm]	250 Nm
Fmax	Max. tractive force [t]	7 t
Fmax	Max. tensile force [kN]	70 kN

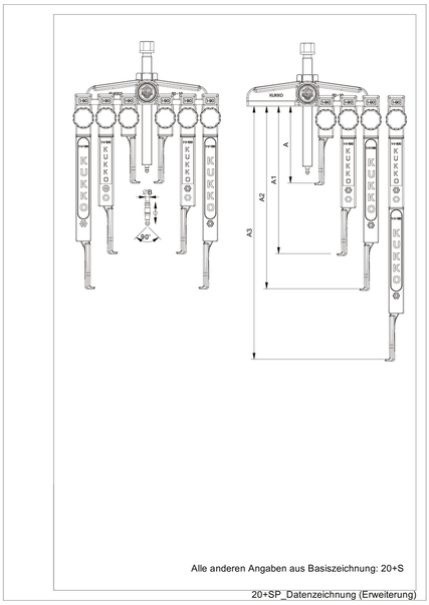

Abbreviation	Attribut	Wert
X	Total width [mm]	420 mm
Y	Total depth [mm]	67 mm
Z	Total height [mm]	337 mm
A	Clamping depth of external puller [mm]	400 mm
S1	Width across flats [mm]	27 mm
S2	Width across flats [mm]	46 mm
Cmin	Span outside pull-off (min.) [mm]	21 mm
Cmax	Span outside pull-off (max.) [mm]	350 mm
A1	Clamping depth of external pull-off A1 [mm]	300 mm
A2	Clamping depth outside pull-off A2 [mm]	400 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6,5 mm
J	Hook base width (claw width J) [mm]	35 mm
O	Hook base depth usable (claw depth usable O) [mm]	22 mm
H	Total hook root depth (total claw depth H) [mm]	52 mm
L	Total claw thickness (L+1mm) [mm]: (claw distance to base surface)	6,5 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	440 mm
Tmax	Max. torque [Nm]	250 Nm
Fmax	Max. tractive force [t]	7 t
Fmax	Max. tensile force [kN]	70 kN