
13-1 TRI-PULL removing device with 3 segments, shaft diameter 12 mm - 50 mm, 13,5 mm usable cutting depth



APPLICATION IMAGE



DETAIL IMAGE

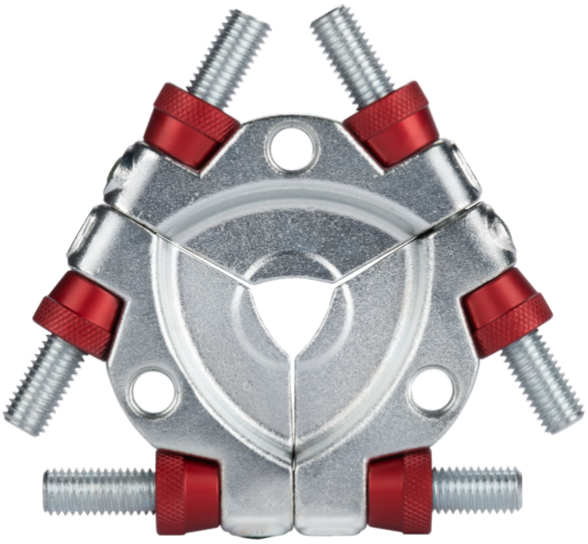

DESCRIPTION

The 3-part TRI-PULL Removing device of the series 13 is used for gentle removal of spherical and tapered roller bearings in drive technology. The segments are positioned behind the bearing on the inner ring and thus ensure uniform force transmission across the entire bearing.

APPLICATION AREA

For the gentle removal of spherical and tapered roller bearings in drive technology

BENEFIT

- The interference-fit installation of the separators on the inner ring protects the bearing from damage during disassembly.
- The uniform force distribution on the inner ring circumference prevents tilting or misalignment of the bearing ring during disassembly.
- The sharp edges also enable non-destructive disassembly where other Pullers are inapplicable.

OPERATION

- Attach and secure segments behind the bearing on the inner ring

- Tension separating jaws by evenly tightening the adjusting nuts on the side bolts of the TRI-PULL, ensuring that the separating knife rests against the part to be removed

- Screw the side screw of the puller into the thread holes of the TRI-PULL until it stops

- Hold the TRI-PULL securely and carefully remove the respective part by tightening the tensioning nut

MASTER DATA

GTIN [GTIN]	4021176041228
Country of origin	DE
Material	Tool steel
Series	13
Gross weight [kg]	0,6 kg
Package contents	1 piece
Packaging Act	Rezykkat rHDPE 61
Worldwide sales capability	Yes (REACH, RoHS, POP, PROP65, TSCA)

SUITABLE FOR

- 68-1_Universal Puller

SPARE PARTS

- 13-T_ Crossbar for 13