
Similar to ISO 7380

Safety screws

Pan head | Hexagon socket drive with tang

Stainless steel A2 | Cr(VI)-free | Metric thread



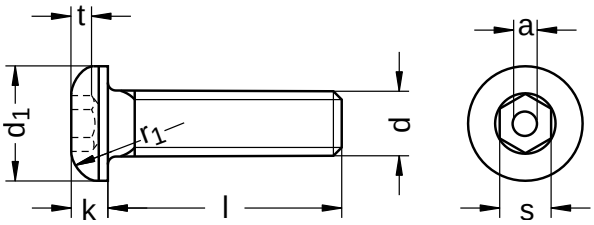

Diameter (d)	Tool size	a		d_1			k		
		min.	max.	nominal size	min.	max.	nominal size	min.	max.
M4	SW 2,5	0.9	1.1	7.6	7.24	7.6	2.20	1.95	2.20
M5	SW 3	1.1	1.3	9.5	9.14	9.5	2.75	2.50	2.75
M6	SW 4	1.4	1.6	10.5	10.07	10.5	3.30	3.00	3.30
M8	SW 5	1.8	2.0	14	13.57	14.0	4.40	4.10	4.40
M12	–	–	–	–	–	–	–	–	–

Diameter (d)	r_1	s			Pitch	t
	nominal size	nominal size	min.	max.	(P)	nominal size
M4	4.1	2.5	2.52	2.58	0.70	1.30
M5	5.2	3.0	3.02	3.08	0.80	1.56
M6	5.6	4.0	4.02	4.10	1.00	2.08
M8	7.5	5.0	5.02	5.14	1.25	2.60
M12	–	–	–	–	1.75	–

Length (l) nominal size
10
12
16
20
25
30

Length (l) nominal size
35
40
45
50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

Similar to ISO 7380

Safety screws

Pan head | Hexagon socket drive with tang

Stainless steel A2 | Cr(VI)-free | Metric thread

Diameter (d)	Length (l) 10	12	16	20	25	30	35	40	45	50
M4	●	●	●	●	●	●				
M5	●	●	●	●	●	●				
M6	●	●	●	●	●	●	●	●	●	●
M8		●	●	●	●	●	●	●	●	●
M12					●					

•

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.