
NORD-LOCK® wedge-locking washers

Enlarged outer diameter



Steel | zinc flake coating | Cr(VI)-free

Further information: Laser marking with lot number | For further information and CAD-files please use the link to NORD-LOCK© homepage: http://www.solidcomponents.com/?company=SCCAD48YT

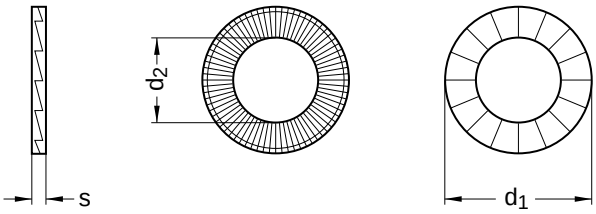

Diameter	d_1			d_2			s			Pitch
(d)	nominal size	min.	max.	nominal size	min.	max.	nominal size	min.	max.	(P)
M4	9	8.8	9.2	4.4	4.3	4.5	1.8	1.55	2.05	0.70
M5	10.8	10.6	11.0	5.4	5.3	5.5	1.8	1.55	2.05	0.80
M6	13.5	13.3	13.7	6.5	6.4	6.6	2.5	2.25	2.75	1.00
M8	16.6	16.4	16.8	8.7	8.6	8.8	2.5	2.25	2.75	1.25
M10	21	20.8	21.2	10.7	10.5	10.9	2.5	2.25	2.75	1.50
M12	25.4	25.2	25.6	13	12.8	13.2	3.4	3.15	3.65	1.75
M14	30.7	30.5	30.9	15.2	15.0	15.4	3.4	3.15	3.65	2.00
M18	34.5	34.3	34.7	19.5	19.3	19.7	3.4	3.15	3.65	2.50
M30	58.5	58.2	58.8	31.4	31.2	31.6	5.8	5.55	6.05	3.50

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.