E 5451


EJOT® Delta PT screws

Pan head with pressed-on washer | Torx Plus / Autosert drive



Stainless steel A2 | Cr(VI)-free | Self-tapping thread

Note: Further information and CAD files can be obtained directly from EJOT:
http://www.ejot.com/industry

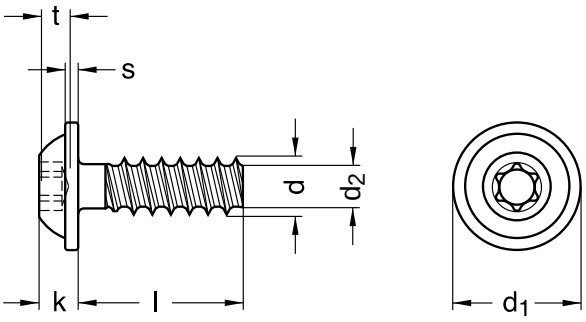

Diameter (d)	Tool size	d_1 nominal size	d_2 nominal size	k nominal size	s nominal size	Pitch (P)	t max.	t min.
2	T6	4.5	1.36	1.6	0.6	0.78	0.85	0.65
2.2	T6	5	1.51	1.6	0.6	0.85	0.85	0.65
2.5	T8	5.5	1.72	1.9	0.7	0.95	1.00	0.80
3	T10	6.5	2.09	2.3	0.8	1.12	1.30	1.00
3.5	T15	7.5	2.45	2.7	0.9	1.29	1.50	1.10
4	T20	9	2.81	3.1	1.0	1.46	1.80	1.40
5	T25	11	3.53	3.5	1.2	1.80	1.90	1.50
6	T30	13.5	4.26	4.2	1.4	2.14	2.40	1.90

Length (l) nominal size	Length (l) nominal size
4.5	14.0
6.0	15.0
7.0	16.0
8.0	20.0
10.0	25.0
12.0	30.0

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.

E 5451

EJOT® Delta PT screws

Pan head with pressed-on washer | Torx Plus / Autosert drive

Stainless steel A2 | Cr(VI)-free | Self-tapping thread

Diameter	Length (l)											
(d)	4.5	6	7	8	10	12	14	15	16	20	25	30
2		●	●	●								
2.2	●			●	●							
2.5		●	●	●				●				
3		●		●	●	●	●		●			
3.5				●	●	●	●		●	●		
4					●	●	●		●	●		●
5									●			
6											●	●

All technical data refer to the measure mm

All technical data without obligation. Subject to technical changes and errors.